



Features of Screw Clamp Terminal Blocks

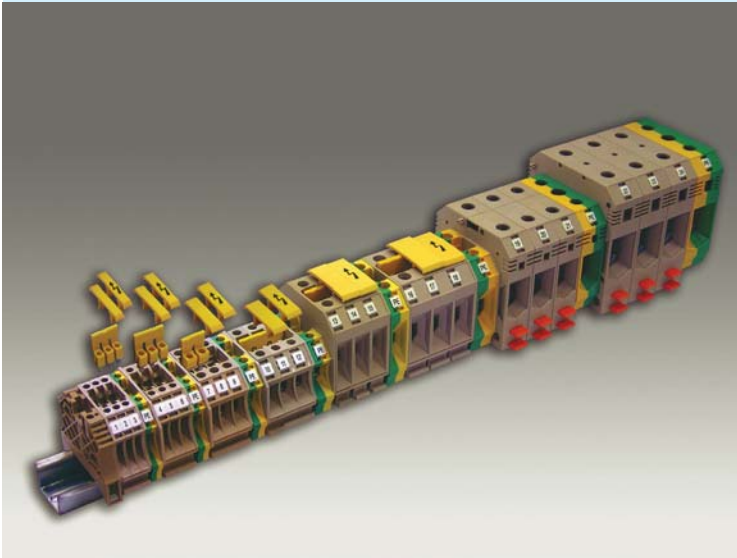

CDU 2.5



Features of Screw Clamp Terminal Blocks

- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Very low contact resistance.
- Easy mounting and dismounting from the terminal rail.

螺絲固定型接線座之特性

- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式 (可連接多組導線)
- 容易擴充及延伸性佳
- 操作簡易且連結處安全性高
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 極低的接觸阻抗
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)	2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	cUL ^{us} 600 V/24 A/AWG 10-22	
CSA	600 V/24 A/AWG 10-22	
IEC	800V/24A/0.5-2.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Torque (lb-in) (扭緊力矩)	7	
Clamping Screw (M) (螺絲)	M3	
Insulation stripping length(mm) (剝線長度)	10-12 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	5 x 60 x 47.5	
For TS35x15	5 x 60 x 55	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
	CEW35/2	50
End Plate (擋板)	CEP 1	50
Partition (擋板/隔片)	CEP 5	50
Cross Jumper (中心式聯接件)	CQV 2.5/2	50
	CQV 2.5/3	50
	CQV 2.5/4	50
	CQV 2.5/10	20
Comb Link (邊接式聯接件)	CQB 2.5/2	50
	CQB 2.5/3	50
	CQB 2.5/10	20
Warning Cover (安全標示蓋)	WS-2.5	50
Marking Tags (標記號)	W5 W5Z W5K	500
	W7 W7Z W7K	400
Test plug (測試插頭)	TPS2.0 (ø2.0)	20
	TPS2.3 (ø2.3)	20
Socket (測試插孔)	TP2.0	50
	TP2.3	50
Protection Cover (防觸蓋)	DP1	20
Retaining Plates (中界板)	AD1	50
Tool (工具)	DS3	