




## Features of Screw Ground Terminal Blocks

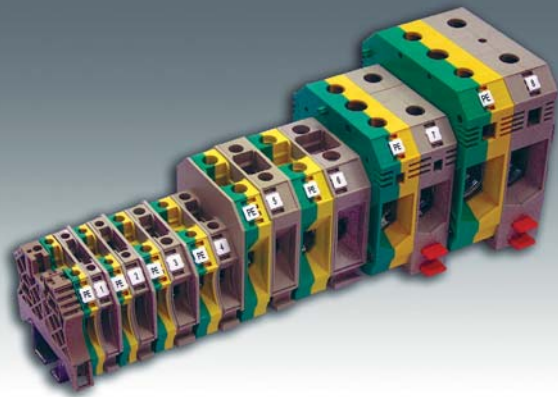

CPE 2.5













### Features of Screw Ground Terminal Blocks

- Very low contact resistance accordance with ground connections in wiring systems of international standards.
- Green-yellow color connection coding was followed by DECA's ground terminal blocks.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Easy mounting and dismounting from the terminal rail.

### 接地型接線座之特性

- 極低的接觸阻抗，符合嚴格的地線連接國際標準規範
- 進聯的接地端子連結設計，符合綠色-黃色相間的國際標準規範
- 容易擴充及延伸性佳
- 操作簡易且連結處安全性高
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)	2.5 mm <sup>2</sup>	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	 US	AWG 12-26
CSA	AWG 12-26	
IEC	0.5-2.5 mm <sup>2</sup>	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Torque (lb-in) (扭緊力矩)	7	
Clamping Screw (M) (螺絲)	M3	
Insulation stripping length(mm) (剝線長度)	10-14 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5 	5 x 57 x 47.5	
For TS35x15 	5 x 57 x 55	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
	CEW35/2	50
Comb Link (邊接式聯接件) 	CQB 2.5/2	50
	CQB 2.5/3	50
	CQB 2.5/10	20
Marking Tags (標記號) 	W5 W5Z W5K	500
	W7 W7Z W7K	400
Protection Cover (防觸蓋) 	DP1	20
Retaining Plates (中界板) 	AD1	50
Tool (工具) 	DS3	