



## Features of Screw Double Level Terminal Blocks

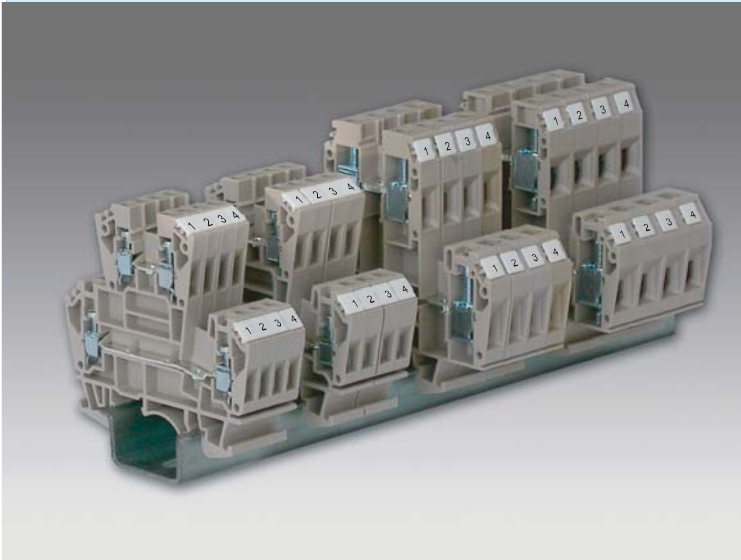

### CDK 2.5V



### Features of Screw Double Level Terminal Blocks

- Double wiring design available without extension of mounting rail.
- Marking / Identification by marking tags possible at both levels .
- Interconnection / shorting possibility at both levels.
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Very low contact resistance.
- Easy mounting and dismantling from the terminal rail.
- Reduce the installation costs and speed the wiring.

### 雙層型接線座之特性

- 雙層接線設計可節省軌道延伸空間
- 可擴充標籤及識別至端子組之雙層
- 上下兩層端子間可供交互連結及短接功能之用
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 極低的接觸阻抗
- 接線座從軌道上安裝及拆卸容易
- 降低裝置成本及可快速接線

Specifications (產品規格)	2.5 mm <sup>2</sup>	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	600V/20A/AWG 12-22	
CSA	600V/20A/AWG 12-22	
IEC	800 V/24 A/0.5-2.5mm <sup>2</sup>	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	
Torque ( lb-in ) (扭緊力矩)	5	
Clamping Screw (M) (螺絲)	M2.6	
Insulation stripping length(mm) (剝線長度)	6 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	5 x 69 x 63.5	
For TS35x15	5 x 69 x 71	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	CEW35/2	50
	SEW35	50
End Plate (擋板)	CEP3	50
Cross Jumper (中心式聯接件)	CQV2.5/2	50
	CQV2.5/3	50
	CQV2.5/4	50
Comb Link (邊接式聯接件)	CQB2.5/2	50
	CQB2.5/3	50
	CQB2.5/4	20
Warning Cover (安全標示蓋)	W5 W5Z W5K	50
Marking Tags (標記號)		
Protection Cover (防觸蓋)	DP1	20
Retaining Plates (中界板)		
Tool (工具)	DS3	