



Screw Disconnect Terminal Blocks

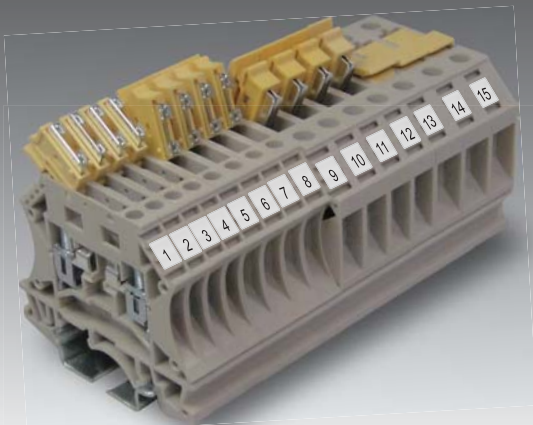

CTR 2.5



Features of Disconnect Terminal Blocks (CTR2.5/4/6/10)

- High current carrying capacity up to 15A .
- Space – saving design.
- Installing terminal plug easily and quickly on the terminal rails(Ease of circuit testing & diagnosis).
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- Stable and low contact resistances.
- Easy mounting and dismantling from the terminal rail.

分離型接線座之特性 (CTR2.5/4/6/10)

- 高電流承載能力
- 節省空間之設計
- 端子插頭安裝及更換容易 (有利於測試及診斷)
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 低且穩定的接觸電阻
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)	2.5 mm ²		
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		
UL	cUL ^{us} 600 V/12 A/AWG 12-22		
CSA	600 V/12 A/AWG 12-22		
IEC	500V/15A/0.5-2.5 mm ²		
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	6KV / 3		
Torque (lb-in) (扭緊力矩)	4.5		
Clamping Screw (M) (螺絲)	M3		
Insulation stripping length(mm) (剝線長度)	10-12 mm		
Material/Availible Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)		
For TS35x7.5	5 x 60 x 47.5		
For TS35x15	5 x 60 x 55		
Accessories (附件)	Cat. No.	Qty.	
End Bracket (終端擋板)	SEW35	50	
	CEW35/2	50	
End Plate (擋板)	CEP 1	50	
Partition (擋板/隔片)	CEP 5	50	
Comb Link (邊接式聯接件)	CQB 2.5/2	50	
	CQB 2.5/3	50	
	CQB 2.5/10	20	
MarkingTags (標記號)	W5 W5Z W5K	500	
	W7 W7Z W7K	400	
Test plug (測試插頭)	TPS2.0 (Ø2)	20	
	TPS2.3 (Ø2.3)	20	
Socket (測試插孔)	TP2.0	50	
	TP2.3	50	
Diode Plug (二極體插頭)	+ -	CSD2.5	25
	- +	CSD2.5	25
LED Fuse Type (顯示型保險絲插座) Insert			
Protection Cover (防觸蓋)	DP1	20	
Retaining Plates (中界板)	AD1	50	
Tool (工具)	DS3		