



Screw Disconnect Terminal Blocks



CTR 4SI

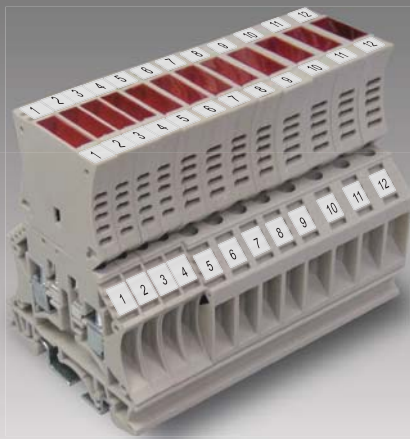


















Features of Fuse Terminal Blocks (CTR4SI/6SI/10SI)

- Fuse terminal blocks can be used to fit fuses easily and quickly on the terminal rails (Ease of fault finding).
- Components as sensors, power supply units and conductors are protected by installing different fuses. (when the current flows through them).
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- Stable and low contact resistances.
- Easy mounting and dismantling from the terminal rail.

保險絲型接線座之特性 (CTR4SI/6SI/10SI)

- 保險絲安裝及更換容易 (有利於故障診斷)
- 保護元件避免受電流衝擊而損毀
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 低且穩定的接觸電阻
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)	4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	c  US 400V/15A/AWG 14-22	
CSA	400V/15A/AWG 14-22	
IEC	400V/15A/0.5-4 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	
Torque (lb-in) (扭緊力矩)	6	
Clamping Screw (M) (螺絲)	M3	
Insulation stripping length(mm) (剝線長度)	10-12 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5 	6 x 60 x 47.5 + 31.5(CSI4)	
For TS35x15 	6 x 60 x 55 + 31.5(CSI4)	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
End Plate (擋板) 	CEW35/2	50
Partition (擋板/隔片) 	CEP 1	50
	CEP 2	50
Comb Link (邊接式聯接件) 	CQB 4/2	50
	CQB 4/3	50
	CQB 4/10	20
Marking Tags (標記號) 	W6 W6Z W6K	500
	W8 W8Z W8K	400
Test plug (測試插頭) 	-	
Socket (測試插孔) 	-	
Diode Plug (二極體插頭)	+  -	CSD4 25
	-  +	CSD4 25
LED Fuse Type (顯示型保險絲插座) Insert 	CSi4	25
Protection Cover (防觸蓋) 	-	
Retaining Plates (中界板) 	-	
Tool (工具) 	DS3	