



## Features of Spring Clamp Terminal Blocks

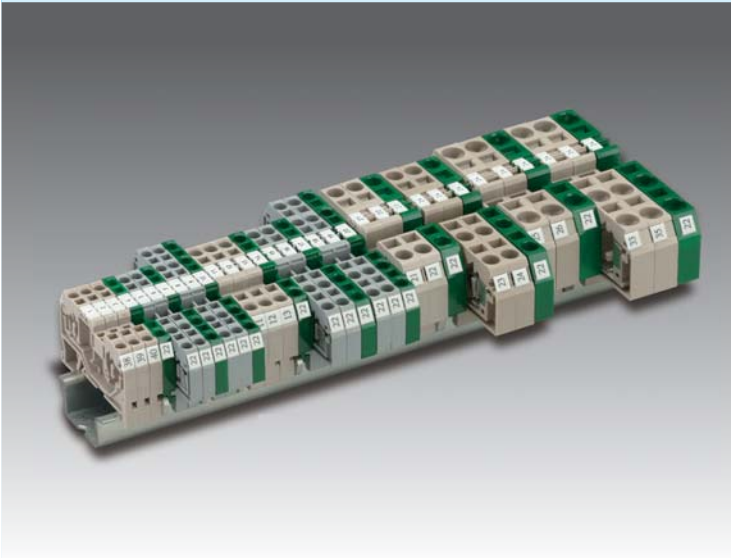

SDU 1.5



### Features of Spring Clamp Terminal Blocks

- Space - saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.

### 彈片壓接型接線座之特性

- 節省空間之設計 / 前緣導線連接方式
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 ( 頂部進線 )
- 抗腐蝕性佳 ( 使用良好的金屬材料 )
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	1.5 mm <sup>2</sup>	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	600V/10A/AWG 16-28	
CSA	600V/10A/AWG 16-28	
IEC	800V/17.5A/0.2-1.5 mm <sup>2</sup>	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	4x52x34.5	
For TS35x15	4x52x42	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)	SEP15	50
Comb Link (邊接式聯接件)	SQV1.5/2	50
	SQV1.5/3	50
	SQV1.5/4	50
Marking Tags (標記號)	W3 W3Z W3K	500
Tool (工具)	DS2	