


Features of spring Clamp Terminal Blocks



SDUB 1.5



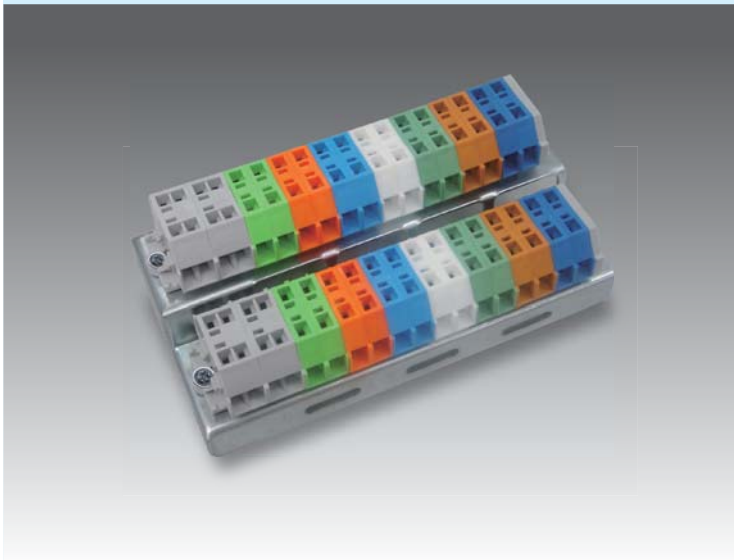










Features of Spring Clamp Terminal Blocks

- Space - saving design
- Top entry & side entry are available at customer's option.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.

彈片壓接型接線座之特性

- 節省空間之設計
- 上方導線及側向導線二種連接方式可供選擇
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	1.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	 US	300V/10A/AWG28-16
CSA		300V/10A/AWG28-16
IEC		400V/17.5A/0.2-1.5 mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)		6KV / 3
Insulation stripping length(mm) (剝線長度)		8-10mm
Material/Available Color (材質顏色)		
Dimensions (外形尺寸)	T / W / H (mm)	
	5x25x17	
Accessories (附件)	Cat. No.	Qty.
	SDUB 1.5-A	25
	SDUB 1.5/2-B	25
	SDUB 1.5/2-A	25
	SDUB 1.5/2-B	25
End Bracket (擋板) 	SDUB 1.5/2-C	25
Comb Link (邊接式聯接件) 	SQB 1.5	25
Lever (壓板) 	SDUB 1.5-D	25
Tool (工具) 	DS 2.5	10