




SDUB 1.5/2






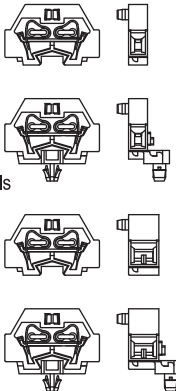






SDUB 2.5



SDUB 2.5/2



Specifications (產品規格)	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage/Rated current/Wire size</b>	<b>Rated voltage/Rated current/Wire size</b>	<b>Rated voltage/Rated current/Wire size</b>
UL	300V/10A/AWG28-16	 300V/15A/AWG28-14	300V/15A/AWG28-14
CSA	300V/10A/AWG28-16	300V/15A/AWG28-14	300V/15A/AWG28-14
IEC	400V/17.5A/0.2-1.5 mm <sup>2</sup>	 500V/24A/0.2-2.5 mm <sup>2</sup>	500V/24A/0.2-2.5 mm <sup>2</sup>
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	6KV / 3	6KV / 3	6KV / 3
Insulation stripping length(mm) (剝線長度)	8-10mm	8-10mm	8-10mm
Material/Available Color (材質顏色)			
<b>Dimensions (外形尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
	8x25x17	6x28x18	10x28x18
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
 Central Terminals (中間端子)	SDUB 1.5-A      25	SDUB 2.5-A      25	SDUB 2.5-A      25
	SDUB 1.5-B      25	SDUB 2.5-B      25	SDUB 2.5-B      25
	SDUB 1.5/2-A      25	SDUB 2.5/2-A      25	SDUB 2.5/2-A      25
	SDUB 1.5/2-B      25	SDUB 2.5/2-B      25	SDUB 2.5/2-B      25
 End Bracket (擋板)	SDUB 1.5-C      25	SDUB 2.5-C      25	SDUB 2.5-C      25
 Comb Link (邊接式聯接件)	SQB 1.5      25	SQB 2.5      25	SQB 2.5      25
 Lever (壓板)	SDUB 1.5-D      25	SDUB 2.5-D      25	SDUB 2.5-D      25
 Tool (工具)	DS 2.5      10	DS 3      10	DS 3      10