


Features of spring Clamp Terminal Blocks



SDUNB 2.5

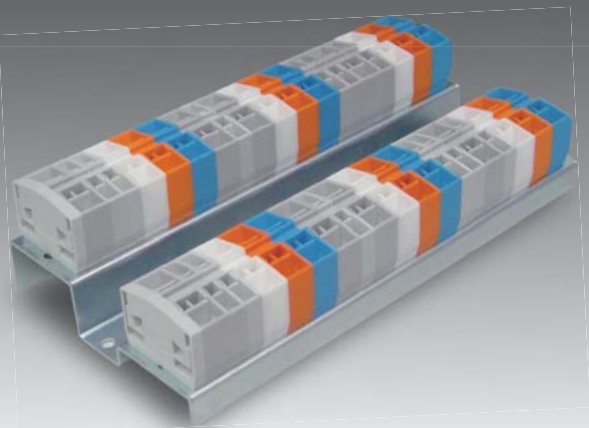

Features of Spring Clamp Terminal Blocks

- Space - saving design
- Top entry & side entry are available at customer's option.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.

彈片壓接型接線座之特性

- 節省空間之設計
- 上方導線及側向導線二種連接方式可供選擇
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	2.5 mm ²		
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		
UL	cUL [®] US 600V/15A/AWG28-12		
CSA	600V/15A/AWG28-12		
IEC	800V/24A/0.2-2.5 mm ²		
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	8KV / 3		
Insulation stripping length(mm) (剝線長度)	10-12mm		
Material/Available Color (材質顏色)			
Dimensions (外形尺寸)	T / W / H (mm)		
	6x22.2x32.2		
Accessories (附件)	Cat. No.	Qty.	
(中間端子)	SDUNB2.5-B	25	
	SDUNS2.5-B	25	
	SDUNS2.5/2-A	25	
	SDUNB2.5/2-B	25	
End Bracket (終端擋板)	SDUNB2.5-C	25	
Comb Link (邊接式聯接件)			
Marking Tags (標記號)	W6	W6Z	W6K 500
End Plate (擋板)			
Tool (工具)	DS3	25	