



Features of Spring Clamp Ground Terminal Blocks



SPE 1.5

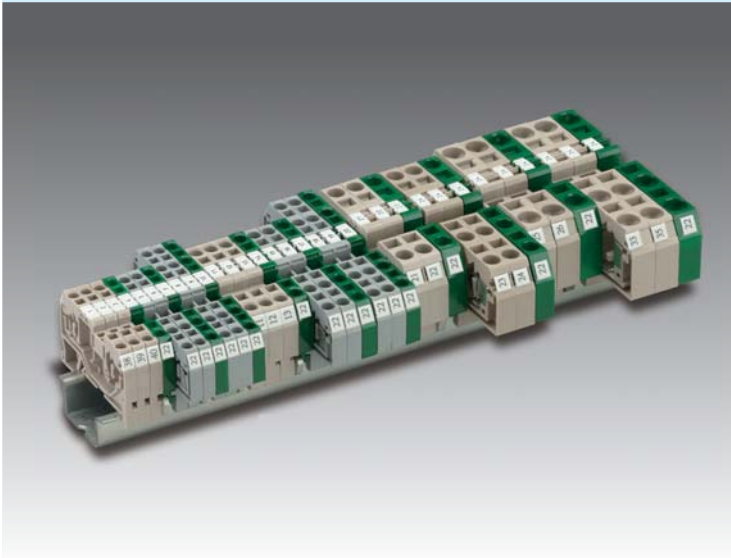








Features of Spring Clamp Ground Terminal Blocks

- Vibration proof grounding
- Space-saving design / Front connection.
- Easy to operate, fast wiring installation with top wire entry.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- Low contact resistance.
- Easy mounting and dismounting from the terminal rail.

彈片接地型接線座之特性

- 具有抗震及接地之效果
- 節省空間之設計 / 前緣導線連接方式
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高
- 低接觸電阻
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)	1.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	AWG16-28	
CSA	AWG16-28	
IEC	0.2-1.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9mm	
Material/Available Color (材質顏色)	●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5 	4x52x34.5	
For TS35x15 	4x52x42	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
End Plate (擋板) 	SEP15	50
Comb Link (邊接式聯接件) 	SQV1.5/2	50
	SQV1.5/3	50
	SQV1.5/4	50
Marking Tags (標記號) 	W3 W3Z W3K	500
Tool (工具) 	DS2	