


## Features of Spring Clamp Terminal Blocks 彈片壓接型接線座

## Features of Spring Clamp Terminal Blocks

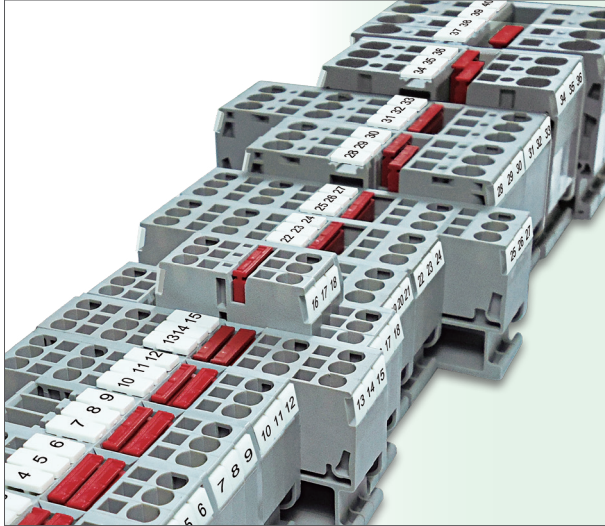


## Features of Spring Clamp Terminal Blocks

- Space-saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion-proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.


## 彈片壓接型接線座之特性

- 節省空間之特性 / 前緣導線連接方式
- 高強度壓力的彈度迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高

## DST 1.5-D



CE cULus



<b>Specifications (產品規格)</b>	1.5mm <sup>2</sup>	
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	
<b>UL</b>	600V / 15A / AWG 28-14	
<b>CSA</b>	600V / 15A / AWG 28-14	
<b>IEC</b>	500V / 17.5A / 0.08-1.5mm <sup>2</sup>	
<b>Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)</b>	6KV / 3	
<b>Insulation stripping length (mm) (剝線長度)</b>	10mm	
<b>Material / Available Color (材質顏色)</b>	● ● ● ● ●	
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	
For TS35x 7.5 	4.2 x 48.8 x 36.5	
For TS35x 15 	4.2 x 48.8 x 44	
<b>Accessories (附件)</b>	<b>Cat. No.</b>	<b>Qty.</b>
<b>End Bracket (終端擋板)</b> 	SEW35	50
<b>End Plate (擋板)</b> 	DD-ST2.5-D	50
<b>Comb Link (邊接式聯接件)</b> 	ODFBS2-4	50
	ODFBS3-4	50
	ODFBS4-4	50
	ODFBS5-4	50
	ODFBS10-4	10
<b>Marking Tags (標記號)</b> 	DUC-TMF4	10 (側面 120 位)
	DUC-TM4	10 (正面 120 位)
<b>Tool (工具)</b> 	DS2 (0.4 x 2.5mm)	