


Features of Spring Clamp Terminal Blocks 彈片壓接型接線座

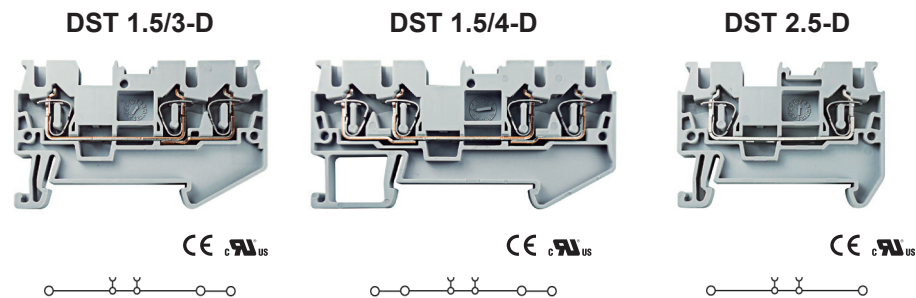

Specifications (產品規格)	1.5mm ²		1.5mm ²		2.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / 15A / AWG 28-14		600V / 15A / AWG 28-14		600V / 20A / AWG 28-12	
CSA	600V / 15A / AWG 28-14		600V / 15A / AWG 28-14		600V / 20A / AWG 28-12	
IEC	500V / 17.5A / 0.08-1.5mm ²		500V / 17.5A / 0.08-1.5mm ²		800V / 31A / 0.08-2.5mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3		6KV / 3		8KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x 7.5	4.2 x 60.7 x 36.5		4.2 x 72.6 x 36.5		5.2 x 48.8 x 36.5	
For TS35x 15	4.2 x 60.7 x 44		4.2 x 72.6x 44		5.2 x 48.8 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板)	DD-ST2.5/3-D	50	DD-ST2.5/4-D	50	DD-ST2.5-D	50
Comb Link (連接式聯接件)	ODFBS2-4	50	ODFBS2-4	50	ODFBS2-5	50
	ODFBS3-4	50	ODFBS3-4	50	ODFBS3-5	50
	ODFBS4-4	50	ODFBS4-4	50	ODFBS4-5	50
	ODFBS5-4	50	ODFBS5-4	50	ODFBS5-5	50
	ODFBS10-4	10	ODFBS10-4	10	ODFBS10-5	10
Marking Tags (標記號)	DUC-TMF4	10 (側面 120 位)	DUC-TMF4	10 (側面 120 位)	DUC-TMF5	96 (側面 96 位)
	DUC-TM4	10 (正面 120 位)	DUC-TM4	10 (正面 120 位)	DUC-TM5	96 (正面 69 位)
Tool (工具)	DS2 (0.4 x 2.5mm)		DS2(0.4 x 2.5mm)		DS3(0.4 x 3.5mm)	