


## Features of Spring Clamp Terminal Blocks 彈片壓接型接線座

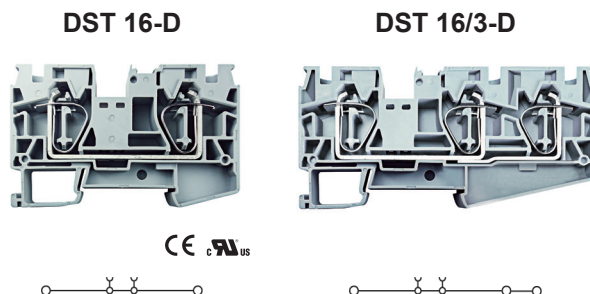

Specifications (產品規格)	16mm <sup>2</sup>	16mm <sup>2</sup>
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	600V / 80A / AWG 24-4	600V / 80A / AWG 24-4
CSA	600V / 80A / AWG 24-4	600V / 80A / AWG 24-4
IEC	1000V / 90A / 0.2-16mm <sup>2</sup>	1000V / 90A / 0.2-16mm <sup>2</sup>
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	18mm	18mm
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x 7.5	12.2 x 80.6 x 51.5	12.2 x 107.8 x 51.5
For TS35x 15	12.2 x 80.6 x 59	12.2 x 107.8 x 59
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)	DD-ST16-D	50
Comb Link (邊接式聯接件)	ODFBS2-12	10
Marking Tags (標記號)	DUC-TMF12	10 (側面 40 位)
	DUC-TM12	10 (正面 40 位)
Tool (工具)	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)