


Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

Features of Spring Clamp Ground Terminal Blocks

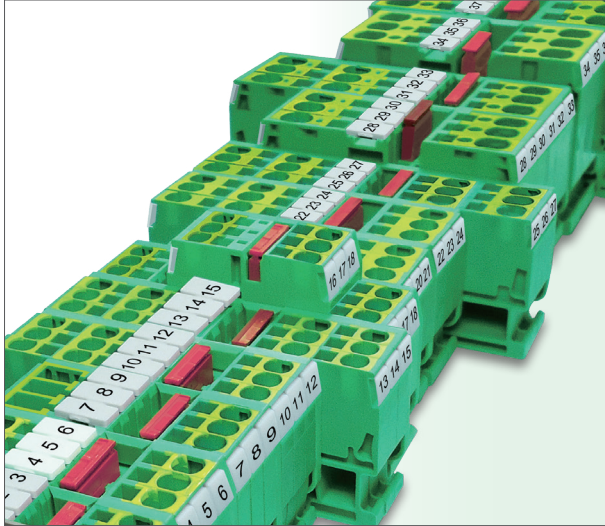


Features of Spring Clamp Ground Terminal Blocks

- Vibration proof grounding
- Space-saving design / Front connection.
- Easy to operate, fast wiring installation with top wire entry.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.
- Low contact resistance.
- Easy mounting and dismounting from the terminal rail.

彈片接地型接線座之特性

- 具有抗震及接地之效果
- 節省空間之設計 / 前緣導線連接方式
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 低接觸電阻
- 接線座從軌道上安裝及拆卸容易

DST 1.5-PE-D



CE 



Specifications (產品規格)	1.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	600V / AWG 28-14	
CSA	600V / AWG 28-14	
IEC	500V / 0.08-1.5mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm	
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x 7.5		4.2 x 48.8 x 36.5
For TS35x 15		4.2 x 48.8 x 44
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)		SEW35 50
End Plate (擋板)		DD-ST2.5-DP 50
Comb Link (連接式聯接件)		ODFBS2-4 50 ODFBS3-4 50 ODFBS4-4 50 ODFBS5-4 50 ODFBS10-4 10
Marking Tags (標記號)		DUC-TMF4 10 (側面 120 位) DUC-TM4 10 (正面 120 位)
Tool (工具)		DS2 (0.4 x 2.5mm)