


Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

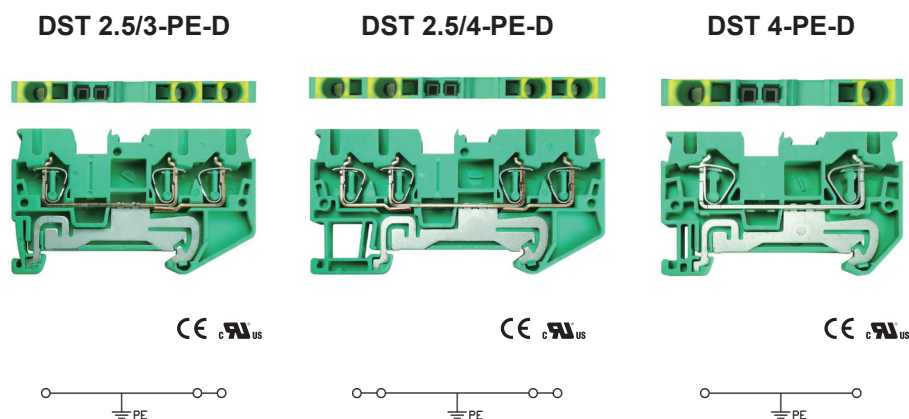

Specifications (產品規格)	2.5mm ²	2.5mm ²	4mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / AWG 28-12	600V / AWG 28-12	600V / AWG 28-10
CSA	600V / AWG 28-12	600V / AWG 28-12	600V / AWG 28-10
IEC	800V / 0.08-2.5mm ²	800V / 0.08-2.5mm ²	800V / 0.08-4mm ²
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	10mm	10mm	10mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	5.2 x 60.7 x 36.5	5.2 x 72.4 x 36.5	6.2 x 56.1 x 36.5
For TS35x 15	5.2 x 60.7 x 44	5.2 x 72.4 x 44	6.2 x 56.1 x 44
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-ST2.5/3-DP 50	DD-ST2.5/4-DP 50	DD-ST4-DP 50
Comb Link (連接式聯接件)	ODFBS2-5 50 ODFBS3-5 50 ODFBS4-5 50 ODFBS5-5 50 ODFBS10-5 10	ODFBS2-5 50 ODFBS3-5 50 ODFBS4-5 50 ODFBS5-5 50 ODFBS10-5 10	ODFBS2-6 50 ODFBS3-6 50 ODFBS4-6 50 ODFBS5-6 50 ODFBS10-6 10
Marking Tags (標記號)	DUC-TMF5 10 (側面 96 位) DUC-TM5 10 (正面 96 位)	DUC-TMF5 10 (側面 96 位) DUC-TM5 10 (正面 96 位)	DUC-TMF6 10 (側面 80 位) DUC-TM6 10 (正面 80 位)
Tool (工具)	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 4.0mm)