


## Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

## PUSH IN SREIES

## Push In Spring Clamp Terminal Blocks




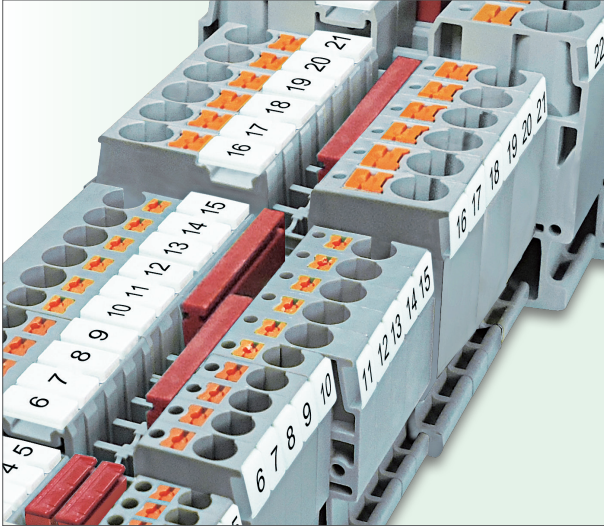






## Push In Spring Clamp Terminal Blocks

- Space-saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion-proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.
- Connecting without tools, easy and time-saving.
- Colored platens ensure safety connections and operations.

## 推入式彈片壓接型接線座

- 節省空間之特性 / 前緣導線連接方式
- 高強度壓力的彈度迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 連接導線無需工具即可，輕鬆、節省時間
- 帶顏色的退線按鈕，確保安全接線和操作



|   |  |               |
|---|--|---------------|
| <b>Specifications (產品規格)</b>  | 1.5mm <sup>2</sup>                               |               |
| <b>Technical Data (技術參數)</b>  | <b>Rated voltage / Rated current / Wire Size</b> |               |
| <b>UL</b>   | 600V / 15A / AWG 26-14                           |               |
| <b>CSA</b>  | 600V / 15A / AWG 26-14                           |               |
| <b>IEC</b>  | 500V / 17.5A / 0.14-1.5mm <sup>2</sup>           |               |
| <b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)</b>                                  | 6KV / 3  |               |
| <b>Insulation stripping length (mm) (剝線長度)</b>  | 10mm   |               |
| <b>Material / Available Color (材質顏色)</b>  | ● ● ● ● ●  |               |
| <b>Rail Dimensions (導軌尺寸)</b>   | <b>T / W / H (mm)</b>                            |               |
| For TS35x 7.5              | 3.5 x 45 x 32                                    |               |
| For TS35x 15               | 3.5 x 45 x 39.5                                  |               |
| <b>Accessories (附件)</b>   | <b>Cat. No.</b>                                  | <b>Qty.</b>   |
| <b>End Bracket (終端擋板)</b>  | SEW35  | 50            |
| <b>End Plate (擋板)</b>      | DD-PT1.5-D                                       | 50            |
| <b>Comb Link (邊接式聯接件)</b>  | ODFBS2-3.5                                       | 50            |
|   | ODFBS3-3.5                                       | 50            |
|   | ODFBS4-3.5                                       | 50            |
|   | ODFBS5-3.5                                       | 50            |
|   | ODFBS10-3.5                                      | 10            |
| <b>Marking Tags (標記號)</b>  | DUC-TMF3.5                                       | 10 (側面 144 位) |
|   | DUC-TM3.5  | 10 (正面 144 位) |
| <b>Tool (工具)</b>           | DS2 (0.4 x 2.0mm)                                |               |