


Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

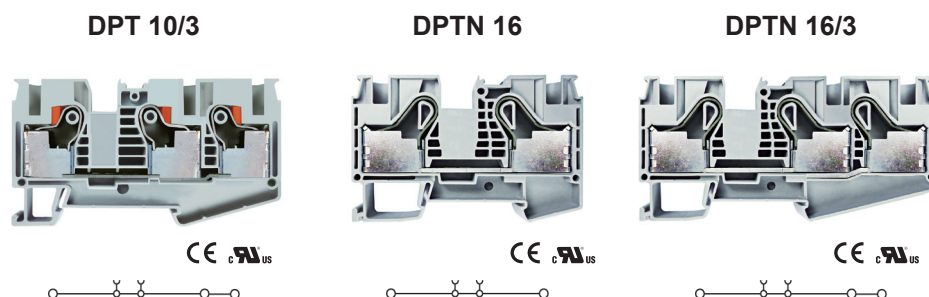

Specifications (產品規格)	10mm ²	16mm ²	16mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 60A / AWG 20-6	600V / 85A / AWG 20-4	600V / 85A / AWG 20-4
CSA	600V / 60A / AWG 20-6	600V / 85A / AWG 20-4	600V / 85A / AWG 20-4
IEC	1000V / 57A / 0.5-10mm ²	1000V / 76A / 0.5-16mm ²	1000V / 76A / 0.5-16mm ²
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	18mm	18mm	18mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	10.2 x 88.9 x 50.5	12.2 x 77.6 x 51.5	12.2 x 104 x 51.5
For TS35x 15	10.2 x 88.9 x 58	12.2 x 77.6 x 59	12.2 x 104 x 59
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT10/3-D 50	DD-PTN16-D 50	DD-PTN16/3-D 50
Comb Link (邊接式聯接件)	ODFBS2-10 10 ODFBS5-10 10	ODFBS2-12 10	ODFBS2-12 10
Marking Tags (標記號)	DUC-TMF10 10 (側面 48 位) DUC-TM10 10 (正面 48 位)	DUC-TMF12 10 (側面 40 位) DUC-TM12 10 (正面 40 位)	DUC-TMF12 10 (側面 40 位) DUC-TM12 10 (正面 40 位)
Tool (工具)	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)