


Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

DPT2.5/4-DIO/L-R

DPT2.5/4-DIO/R-L

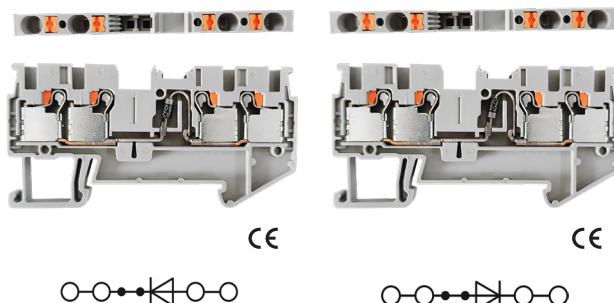

Specifications (產品規格)	2.5mm ²	2.5mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	300V / 0.5A / AWG 26-12	300V / 0.5A / AWG 26-12
CSA	300V / 0.5A / AWG 26-12	300V / 0.5A / AWG 26-12
IEC	800V / 0.5A / 0.14-2.5mm ²	800V / 0.5A / 0.14-2.5mm ²
DIODE	IN 4007(1000V 0.5A)	IN 4007(1000V 0.5A)
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	10mm	10mm
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	5.2 x 72.2 x 36.8	5.2 x 78.8 x 47.6
For TS35x 15	5.2 x 72.2 x 44.3	5.2 x 78.8 x 55.5
Accessories (附件)	Cat. No.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35	SEW35
End Plate (擋板)	DD-PT2.5/4-D	DD-PT2.5/4-D
Comb Link (邊接式聯接件)	ODDFBS2-5 ODFBS3-5 ODFBS4-5 ODFBS5-5 ODFBS3-10-5	ODDFBS2-5 ODFBS3-5 ODFBS4-5 ODFBS5-5 ODFBS3-10-5
Marking Tags (標記號)	DUC-TMF5 10片 (側面 96位) DUC-TM5 10片 (正面 96位)	DUC-TMF5 10 (側面 96位) DUC-TM5 10 (正面 96位)
Tool (工具)	0.4 x 3.5mm	DS3 (0.4 x 3.5mm)