


Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

PUSH IN GROUNDING SREIES

Push In Spring Clamp Ground Terminal Blocks

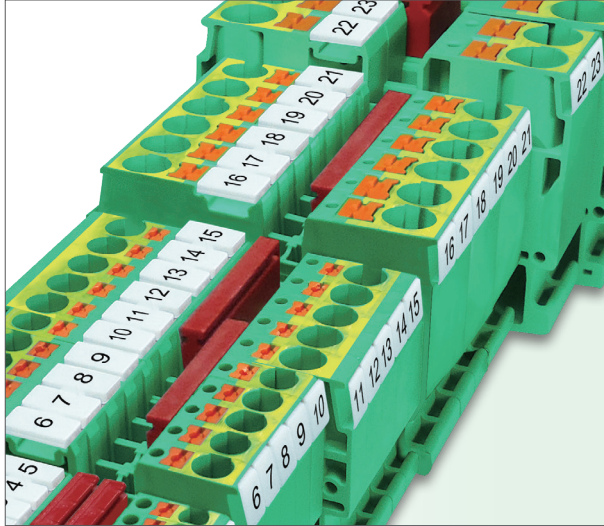


Push In Spring Clamp Ground Terminal Blocks








- Vibration proof grounding
- Space-saving design / Front connection.
- Easy to operate, fast wiring installation with top wire entry.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.
- Low contact resistance.
- Easy mounting and dismantling from the terminal rail.
- Connecting without tools, easy and time-saving.
- Colored platens ensure safety connections and operations.

推入式彈片接地型接線座

- 具有抗震及接地之效果
- 節省空間之設計 / 前緣導線連接方式
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 低接觸電阻
- 接線座從軌道上安裝及拆卸容易
- 連接導線無需工具即可，輕鬆、節省時間
- 帶顏色的退線按鈕，確保安全接線和操作

DPT 1.5-PE



Specifications (產品規格)	1.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	600V / AWG 26-14	
CSA	600V / AWG 26-14	
IEC	500V / 0.14-1.5mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm	
Material / Available Color (材質顏色)	●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x 7.5 	3.5 x 45 x 32	
For TS35x 15 	3.5 x 45 x 39.5	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
End Plate (擋板) 	DD-PT1.5-DP	50
Comb Link (邊接式聯接件) 	ODFBS2-3.5	50
	ODFBS3-3.5	50
	ODFBS4-3.5	50
	ODFBS5-3.5	50
	ODFBS10-3.5	10
Marking Tags (標記號) 	DUC-TMF3.5	10 (側面 144 位)
	DUC-TM3.5	10 (正面 144 位)
Tool (工具) 	DS2 (0.4 x 2.0mm)	