


Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

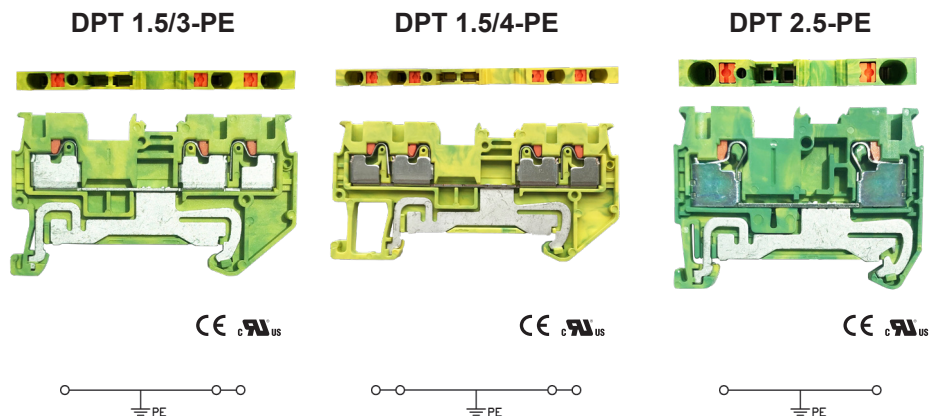

Specifications (產品規格)	1.5mm ²	1.5mm ²	2.5mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / AWG 26-14	600V / AWG 26-14	600V / AWG 26-12
CSA	600V / AWG 26-14	600V / AWG 26-14	600V / AWG 26-12
IEC	500V / 0.14-1.5mm ²	500V / 0.14-1.5mm ²	800V / 0.14-2.5mm ²
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	6KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	10mm	10mm	10mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	3.5 x 54.1 x 32	3.5 x 63.2 x 32	5.2 x 48.5 x 36.5
For TS35x 15	3.5 x 54.1 x 39.5	3.5 x 63.2 x 39.5	5.2 x 48.5 x 44
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT1.5/3-DP 50	DD-PT1.5/4-DP 50	DD-PT2.5-DP 50
Comb Link (連接式聯接件)	ODFBS2-3.5 50 ODFBS3-3.5 50 ODFBS4-3.5 50 ODFBS5-3.5 50 ODFBS10-3.5 10	ODFBS2-3.5 50 ODFBS3-3.5 50 ODFBS4-3.5 50 ODFBS5-3.5 50 ODFBS10-3.5 10	ODFBS2-5 50 ODFBS3-5 50 ODFBS4-5 50 ODFBS5-5 50 ODFBS10-5 10
Marking Tags (標記號)	DUC-TMF3.5 10 (側面 144 位) DUC-TM3.5 10 (正面 144 位)	DUC-TMF3.5 10 (側面 144 位) DUC-TM3.5 10 (正面 144 位)	DUC-TMF5 10 (側面 96 位) DUC-TM5 10 (正面 96 位)
Tool (工具)	DS2 (0.4 x 2.0mm)	DS2 (0.4 x 2.0mm)	DS3 (0.4 x 3.5mm)