


Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

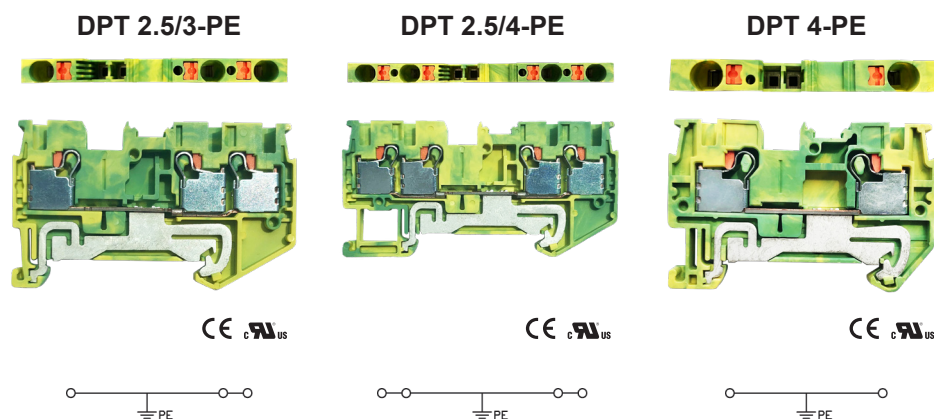

Specifications (產品規格)	2.5mm ²		2.5mm ²		4mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / AWG 26-12		600V / AWG 26-12		600V / AWG 24-10	
CSA	600V / AWG 26-12		600V / AWG 26-12		600V / AWG 24-10	
IEC	800V / 0.14-2.5mm ²		800V / 0.14-2.5mm ²		800V / 0.2-4mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x 7.5	5.2 x 60.7 x 36.5		5.2 x 72.4 x 36.5		6.2 x 56.1 x 36.5	
For TS35x 15	5.2 x 60.7 x 44		5.2 x 72.4 x 44		6.2 x 56.1 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板)	DD-PT2.5/3-DP	50	DD-PT2.5/4-DP	50	DD-PT4-DP	50
Comb Link (連接式聯接件)	ODFBS2-5	50	ODFBS2-5	50	ODFBS2-6	50
	ODFBS3-5	50	ODFBS3-5	50	ODFBS3-6	50
	ODFBS4-5	50	ODFBS4-5	50	ODFBS4-6	50
	ODFBS5-5	50	ODFBS5-5	50	ODFBS5-6	50
	ODFBS10-5	10	ODFBS10-5	10	ODFBS10-6	10
Marking Tags (標記號)	DUC-TMF5	10 (側面 96 位)	DUC-TMF5	10 (側面 96 位)	DUC-TMF6	10 (側面 80 位)
	DUC-TM5	10 (正面 96 位)	DUC-TM5	10 (正面 96 位)	DUC-TM6	10 (側面 80 位)
Tool (工具)	DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)	