


Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

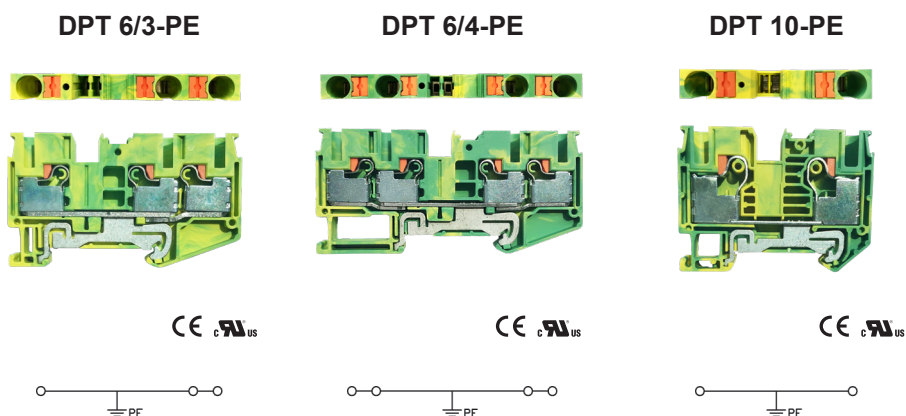

Specifications (產品規格)	6mm ²	6mm ²	10mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / AWG 20-8	600V / AWG 20-8	600V / AWG 20-6
CSA	600V / AWG 20-8	600V / AWG 20-8	600V / AWG 20-6
IEC	1000V / 0.5-6mm ²	1000V / 0.5-6mm ²	1000V / 0.5-10mm ²
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	12mm	12mm	18mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	8.2 x 74.2 x 43.5	8.2 x 90.6 x 43.5	10.2 x 67.7 x 50.5
For TS35x 15	8.2 x 74.2 x 51	8.2 x 90.6 x 51	10.2 x 67.7 x 58
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT6/3-DP 50	DD-PT6/4-DP 50	DD-PT10-DP 50
Comb Link (邊接式聯接件)	ODFBS2-8 50 ODFBS3-8 50 ODFBS4-8 10 ODFBS5-8 50 ODFBS10-8 10	ODFBS2-8 50 ODFBS3-8 50 ODFBS4-8 10 ODFBS5-8 50 ODFBS10-8 10	ODFBS2-10 10 ODFBS5-10 10
Marking Tags (標記號)	DUC-TMF8 10 (側面 56 位) DUC-TM8 10 (正面 56 位)	DUC-TMF8 10 (側面 56 位) DUC-TM8 10 (正面 56 位)	DUC-TMF10 10 (側面 48 位) DUC-TM10 10 (正面 48 位)
Tool (工具)	DS4 (0.4 x 5.5mm)	DS4 (0.4 x 5.5mm)	DS5 (0.4 x 6.5mm)