







COMBI Push In Type Plug In Connection 插拔式接線端

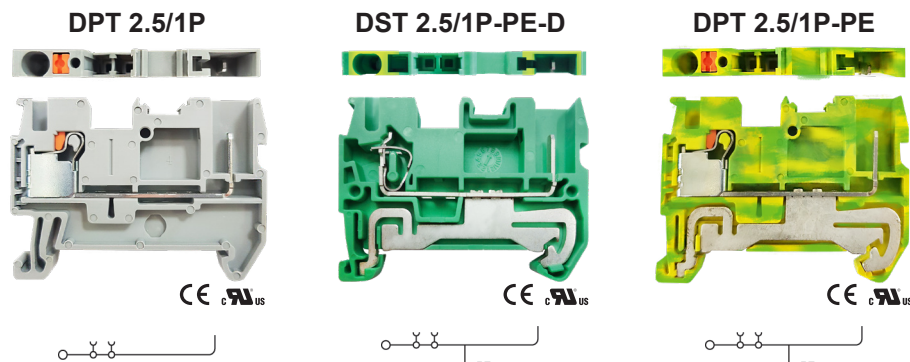

Specifications (產品規格)	2.5mm ²		2.5mm ²		2.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / 20A / AWG 26-12		600V / 20A / AWG 28-12		600V / 20A / AWG 28-12	
CSA	600V / 20A / AWG 26-12		600V / 20A / AWG 28-12		600V / 20A / AWG 28-12	
IEC	500V / 24A / 0.14-2.5mm ²		500V / 24A / 0.08-2.5mm ²		500V / 24A / 0.14-2.5mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3		6KV / 3		6KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)	● ● ● ●		● ●		● ●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35 x 7.5	5.2 x 48.8 x 36.8		5.2 x 48.8 x 36.9		5.2 x 48.8 x 36.8	
For TS35 x 15	5.2 x 48.8 x 44.6		5.2 x 48.8 x 44.4		5.2 x 48.8 x 44.6	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-ST2.5-D	50	DD-ST2.5-DP	50	DD-ST2.5-DP	50
Comb Link (連接式聯接件) 	ODFBS2-5	50	ODFBS2-5	50	ODFBS2-5	50
	ODFBS3-5	50	ODFBS3-5	50	ODFBS3-5	50
	ODFBS4-5	50	ODFBS4-5	50	ODFBS4-5	50
	ODFBS5-5	50	ODFBS5-5	50	ODFBS5-5	50
	ODFBS10-5	10	ODFBS10-5	10	ODFBS10-5	10
Marking Tags (標記號) 	DUC-TMF5	10 (側面 96 位)	DUC-TMF5	10 (側面 96 位)	DUC-TMF5	10 (側面 96 位)
	DUC-TM5	10 (正面 96 位)	DUC-TM5	10 (正面 96 位)	DUC-TM5	10 (正面 96 位)
Tool (工具) 	DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)	