



Features of Screw Clamp Terminal Blocks

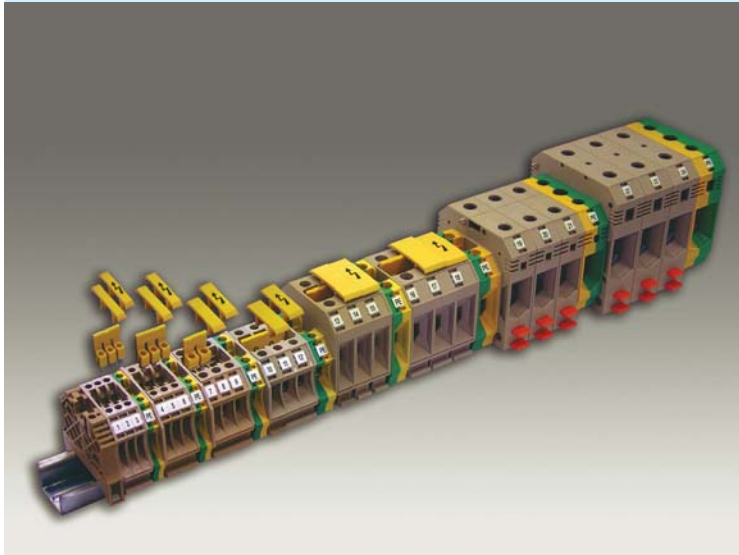

CDU 2.5



Features of Screw Clamp Terminal Blocks


- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Very low contact resistance.
- Easy mounting and dismounting from the terminal rail.

螺絲固定型接線座之特性


- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
(可連接多組導線)
- 容易擴充及延伸性佳
- 操作簡易且連結處安全性高
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 極低的接觸阻抗
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)	2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	cUL [®] 600 V/24 A/AWG 10-22	
CSA	600 V/24 A/AWG 10-22	
IEC	800V/24A/0.5-2.5 mm ²	
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	8KV / 3	
Torque (lb-in) (扭緊力矩)	7	
Clamping Screw (M) (螺絲)	M3	
Insulation stripping length(mm) (剝線長度)	10-12 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	5 x 60 x 47.5	
For TS35x15	5 x 60 x 55	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35 CEW35/2	50 50
End Plate (擋板)	CEP 1	50
Partition (擋板/隔片)	CEP 5	50
Cross Jumper (中心式聯接件)	CQV 2.5/2	50
	CQV 2.5/3	50
	CQV 2.5/4	50
	CQV 2.5/10	20
Comb Link (邊接式聯接件)	CQB 2.5/2	50
	CQB 2.5/3	50
	CQB 2.5/10	20
Warning Cover (安全標示蓋)	WS-2.5	50
Marking Tags (標記號)	W5 W5Z W5K	500
	W7 W7Z W7K	400
Test plug (測試插頭)	TPS2.0 (ø2.0)	20
	TPS2.3 (ø2.3)	20
Socket (測試插孔)	TP2.0	50
	TP2.3	50
Protection Cover (防觸蓋)	DP1	20
Retaining Plates (中界板)	AD1	50
Tool (工具)	DS3	


CDU 2.5 SL



CDU 4




CDU 4 SL




Specifications (產品規格)	2.5 mm ²		4 mm ²		4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	600V/24A/AWG 10-22		 600 V/35 A/AWG 8-22	600 V/35 A/AWG 8-22		
CSA	600V/24A/AWG 10-22		600 V/35 A/AWG 8-22		600 V/35 A/AWG 8-22	
IEC	800V/24A/0.5-2.5mm ²		800 V/32 A/0.5-4mm ²		500V/32A/0.5-4mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3		8KV / 3		8KV / 3	
Torque (lb-in) (扭緊力矩)	7		7.7		7.7	
Clamping Screw (M) (螺絲)	M3		M3		M3	
Insulation stripping length(mm) (剝線長度)	10-12 mm		10-12 mm		10-12 mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5 	5/60/47.5		6 x 60 x 47.5		6 x 60 x 47.5	
For TS35x15 	5/60/55		6 x 60 x 55		6 x 60 x 55	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
	CEW35/2	50	CEW35/2	50	CEW35/2	50
End Plate (擋板) 	CEP 1	50	CEP 1	50	CEP 1	50
Partition (擋板／隔片) 	CEP 5	50	CEP 5	50	CEP 5	50
Cross Jumper (中心式聯接件) 	CQV 2.5/2	50	CQV 4/2	50	CQV 4/2	50
	CQV 2.5/3	50	CQV 4/3	50	CQV 4/3	50
	CQV 2.5/4	50	CQV 4/4	50	CQV 4/4	50
	CQV 2.5/10	20	CQV 4/10	20	CQV 4/10	20
	CQB 2.5/2	50	CQB 4/2	50	CQB 4/2	50
Comb Link (邊接式聯接件) 	CQB 2.5/3	50	CQB 4/3	50	CQB 4/3	50
	CQB 2.5/10	20	CQB 4/10	20	CQB 4/10	20
Warning Cover (安全標示蓋) 	WS-2.5	50	WS-4	50	WS-4	50
MarkingTags (標記號) 	W5 W5Z W5K	500	W6 W6Z W6K	500	W6 W6Z W6K	500
	W7 W7Z W7K	400	W8 W8Z W8K	400	W8 W8Z W8K	400
Test plug (測試插頭) 	TPS2.0 (Ø2.0)	20	TPS2.3 (Ø2.3)	20	TPS2.3 (Ø2.3)	20
	TPS2.3 (Ø2.3)	20				
Socket (測試插孔) 	TP2.0	50	TP2.3	50	TP2.3	50
	TP2.3	50				
Protection Cover (防觸蓋) 	DP1	20	DP1	20	DP1	20
Retaining Plates (中界板) 	AD1	50	AD1	50	AD1	50
Tool (工具) 	DS3		DS3		DS3	



CDU 6



CDU 6 SL



CDU 10




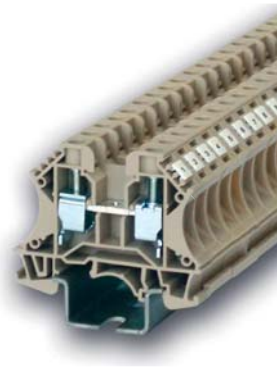


Specifications (產品規格)	6 mm ²		6 mm ²		10 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	c  ^{us} 600 V/50 A/AWG 8-20		600 V/50 A/AWG 8-20		c  ^{us} 600 V/65 A/AWG 6-16	
CSA	600 V/50 A/AWG 8-20		600 V/50 A/AWG 8-20		600 V/65 A/AWG 6-16	
IEC	800V/41A/0.5-6mm ²		800V/41A/0.5-6mm ²		1000V/57A/1.5-10mm ²	
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	8KV / 3		8KV / 3		8KV / 3	
Torque (lb-in) (扭緊力矩)	14		14		19	
Clamping Screw (M) (螺絲)	M4		M4		M4	
Insulation stripping length(mm) (剝線長度)	12-14 mm		12-14 mm		12 14 mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5 	8 x 60 x 47.5		8 x 60 x 47.5		10 x 60 x 47.5	
For TS35x15 	8 x 60 x 55		8 x 60 x 55		10 x 60 x 55	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
	CEW35/2	50	CEW35/2	50	CEW35/2	50
End Plate (擋板) 	CEP 1	50	CEP 1	50	CEP 1	50
Partition (擋板 / 隔片) 	CEP 5	50	CEP 5	50	CEP 5	50
Cross Jumper (中心式聯接件) 	CQV 6/2	50	CQV 6/2	50	CQV 10/2	50
	CQV 6/3	50	CQV 6/3	50	CQV 10/3	50
	CQV 6/4	50	CQV 6/4	50	CQV 10/4	50
	CQV 6/10	20	CQV 6/10	20	CQV 10/10	20
	CQB-6/2	50	CQB-6/2	50	CQB-10/2	50
Comb Link (邊接式聯接件) 	CQB-6/3	50	CQB-6/3	50	CQB-10/3	50
	CQB-6/10	20	CQB-6/10	20	CQB-10/10	20
	WS-6	50	WS-6	50	WS-10	50
Warning Cover (安全標示蓋) 	W6 W6Z W6K	500	W6 W6Z W6K	500	W6 W6Z W6K	500
MarkingTags (標記號) 	W8 W8Z W8K	400	W8 W8Z W8K	400	W8 W8Z W8K	400
Test plug (測試插頭) 	TPS2.3 (Ø2.3)	20	TPS2.3 (Ø2.3)	20	TPS2.3 (Ø2.3)	20
	TPS4 (Ø4)	20	TPS4 (Ø4)	20	TPS4 (Ø4)	20
Socket (測試插孔) 	TP2.3	50	TP2.3	50	TP2.3	50
	TP4	50	TP4	50	TP4	50
Protection Cover (防觸蓋) 	DP1	20	DP1	20	DP1	20
Retaining Plates (中界板) 	AD1	50	AD1	50	AD1	50
Tool (工具)	DS4		DS4		DS4	

CDU10 SL

CDU 16

CDU 35




Specifications (產品規格)	10 mm ²	16 mm ²	35 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	600 V/65 A/AWG 6-16	600 V/78 A/AWG 4-14	1000 V/114 A/AWG 2-10
CSA	600 V/65 A/AWG 6-16	600 V/78 A/AWG 4-14	1000 V/114 A/AWG 2-10
IEC	1000V/57A/6-16mm ²	1000V/76A/2.5-16mm ²	1000V/125A/4-35mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3	8KV / 3	8KV / 3
Torque (lb-in) (扭緊力矩)	19	31	51
Clamping Screw (M) (螺絲)	M4	M5	M6
Insulation stripping length(mm) (剝線長度)	12-14 mm	15-17 mm	16-18 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	10 x 60 x 47.5	12 x 60 x 63.5	16x 60 x 63.5
For TS35x15	10 x 60 x 55	12 x 60 x 71	16 x 60 x 71
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50 CEW35/2 50	SEW35 50 CEW35/1 50	SEW35 50 CEW35/1 50
End Plate (擋板)	CEP 1 50	CEP 2 50	CEP 2 50
Partition (擋板/隔片)	CEP 5 50		
Cross Jumper (中心式聯接件)	CQV 10/2 50 CQV 10/3 50 CQV 10/4 50 CQV 10/10 20	CQV 16/2 50 CQV 16/3 50 CQV 16/4 50	CQV 35/2 50 CQV 35/3 50 CQV 35/4 50
Comb Link (邊接式聯接件)	CQB-10/2 50 CQB-10/3 50 CQB-10/10 20	CQB 16/2 50 CQB 16/3 50 CQB 16/10 20	CQB 35/2 50 CQB 35/3 50 CQB 35/10 20
Warning Cover (安全標示蓋)	WS-10 50	WS-16 50	WS-35 50
Marking Tags (標記號)	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 400
Test plug (測試插頭)	TPS2.3 (Ø2.3) 20 TPS4 (Ø4) 20	TPS4 (Ø4) 20	TPS4 (Ø4) 20
Socket (測試插孔)	TP2.3 50 TP4 50	TP4 50	TP4 50
Protection Cover (防觸蓋)	DP1 20	DP1 20	DP1 20
Retaining Plates (中界板)	AD1 50	AD2 50	AD2 50
Tool (工具)	DS4	DS4	DS6

CDU 50



CDU 95

CDU 150





Specifications (產品規格)	50 mm ²	95 mm ²	150 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	c 1000 V/150 A/AWG 1/0-6	c 1000 V/230 A/AWG 4/0-2	600V/275A/AWG 2-300
CSA	1000 V/150 A/AWG 1/0-6	1000 V/230 A/AWG 4/0-2	600V/275A/AWG 2-300
IEC	1000V/150A/16-50 mm ²	1000V/232A/35-95 mm ²	1000V/309A/35-150mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3	8KV / 3	8KV / 3
Torque (lb-in) (扭緊力矩)	53	150	165
Clamping Screw (M) (螺絲)	M6	M8	M10
Insulation stripping length(mm) (剝線長度)	25-30 mm	30-35 mm	30-40 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	20 x 70.5 x 76	25 x 80 x 90	31x93x109
For TS35x15	20 x 70.5 x 83.5	25 x 80 x 97.5	31x93x116.5
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50 CEW35/1 50	SEW35 50 CEW35/1 50	CEW35/1 50
End Plate (擋板)			
Partition (擋板/隔片)			
Cross Jumper (中心式聯接件)	CQV 50/2 50 CQV 50/3 50		
Comb Link (邊接式聯接件)	CQB-50/2 50 CQB-50/3 50	CQB-95/2 50 CQB-95/3 50	CQB150/2 50
Warning Cover (安全標示蓋)			
MarkingTags (標記號)	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 500
Test plug (測試插頭)			
Socket (測試插孔)			
Protection Cover (防觸蓋)			
Retaining Plates (中界板)			
Tool (工具)	DK5	DK6	DK8

CTL6



CTL6-1




CDUS 2.5




Specifications (產品規格)	6mm ²				6 mm ²				2.5 mm ²			
Technical Data (技術參數)	Rated voltage/Rated current/Wire size				Rated voltage/Rated current/Wire size				Rated voltage/Rated current/Wire size			
UL	 300V/45A/AWG 8-22				 300V/45A/AWG 8-22				300V/20A/AWG 12-22			
CSA	300V/45A/AWG 8-22				300V/45A/AWG 8-22				300V/20A/AWG 12-22			
IEC	800V/41A/0.5-6 mm ²				800V/41A/0.5-6 mm ²				400V/20A/0.2-2.5 mm ²			
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3				6KV / 3				6KV / 3			
Torque (lb-in) (扭緊力矩)	12				12				5			
Clamping Screw (M) (螺絲)	M4				M4				M2.6			
Insulation stripping length(mm) (剝線長度)	13mm				10mm				8mm			
Material/Available Color (材質顏色)												
Rail Dimensions (導軌尺寸)	T / W / H (mm)				T / W / H (mm)				T / W / H (mm)			
For TS35x7.5 	8x65.5x48.5				8x65.5x48.5				6x22x20			
For TS35x15 	8x65.5x56				8x65.5x56							
Accessories (附件)	Cat. No.		Qty.		Cat. No.		Qty.		Cat. No.		Qty.	
End Bracket (終端擋板) 	CEW35/2		50		CEW35/2		50		CDUS2.5-C 50			
	SEW35		50		SEW35		50					
End Plate (擋板) 	CEP8		50		CEP8		50					
Partition (擋板 / 隔片) 	CEP9		50		CEP9		50		-			
Cross Jumper (中心式聯接件) 	-				-							
Comb Link (邊接式聯接件) 	CQB6/2		50		CQB6/2				SQB2.5 50			
	CQB6/3		50		CQB6/3		50					
	CQB6/4		50		CQB6/4							
Warning Cover (安全標示蓋) 												
MarkingTags (標記號) 	W6	W6Z	W6K	500	W6	W6Z	W6K	500	W6	W6Z	W6K	500
	W8	W8Z	W6K	500	W8	W8Z	W6K	500				
Test plug (測試插頭) 	TPS4 (Ø4)		50		TPS4 (Ø4)		50					
Socket (測試插孔) 	TP4		50		TP4		50					
Protection Cover (防觸蓋) 	-											
Retaining Plates (中界板) 	-											
Tool (工具) 	DS4				DS4				DS3			

Features of Screw Clamp Terminal Blocks

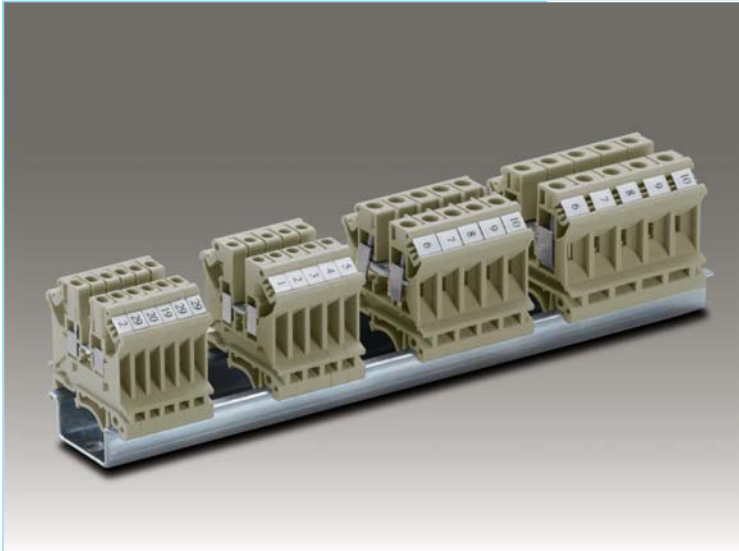

CDU 2.5N



Features of Screw Clamp Terminal Blocks


- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Very low contact resistance.
- Easy mounting and dismounting from the terminal rail.

螺絲固定型接線座之特性


- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
(可連接多組導線)
- 容易擴充及延伸性佳
- 操作簡易且連結處安全性高
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 極低的接觸阻抗
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)	2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	cUL [®] 600V/20A/AWG 12-28	
CSA	600V/20A/AWG 12-28	
IEC	800V/24A/0.5-2.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Torque (lb-in) (扭緊力矩)	7	
Clamping Screw (M) (螺絲)	M2.6	
Insulation stripping length(mm) (剝線長度)	8-10 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	5x42.5 x 47	
For TS35x15	5x42.5x54.5	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
	CEW35/2	50
End Plate (擋板)	CEP 6	50
Partition (擋板/隔片)	CEP 6	50
Cross Jumper (中心式聯接件)	CQV 2.5/2	50
	CQV 2.5/3	50
	CQV 2.5/4	50
	CQV 2.5/10	20
Comb Link (邊接式聯接件)	CQB 2.5/2	50
	CQB 2.5/3	50
	CQB 2.5/10	20
Warning Cover (安全標示蓋)	WSS 2.5	50
Marking Tags (標記號)	W5 W5Z W5K	500
Test plug (測試插頭)	TPS2.3 (Ø2.3)	20
Socket (測試插孔)	TP2.3	50
Protection Cover (防觸蓋)	DP1	20
Retaining Plates (中界板)	AD1	50
Tool (工具)	DS3	


CDU 2.5/3N



CDU 2.5/4N



CDU 4N






Specifications (產品規格)	2.5 mm ²		2.5 mm ²		4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	300V/20A/AWG 12-24		300V/20A/AWG 12-24		cUL [®] 600 V / 30 A / AWG 10-22	
CSA	300V/20A/AWG 12-24		300V/20A/AWG 12-24		600 V / 30 A / AWG 10-22	
IEC	400V/24A/0.2-2.5mm ²		400V/24A/0.2-2.5mm ²		800V/32A/0.5-4mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3		6KV / 3		8KV / 3	
Torque (lb-in) (扭緊力矩)	5		5		7.7	
Clamping Screw (M) (螺絲)	M2.6		M2.6		M3	
Insulation stripping length(mm) (剝線長度)	8 mm		8 mm		8-10 mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	5.2/50.5/47		5.2/63.5/47		6x42.5x47	
For TS35x15	5.2/50.5/54.5		5.2/63.5/54.5		6x42.5x54.5	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	CEW35/2	50	CEW35/2	50	SEW35	50
End Plate (擋板)	CDU2.5/3-C	50	CDU2.5/4-C	50	CEP 6	50
Partition (擋板 / 隔片)	-	50	-	50	CEP 6	50
Cross Jumper (中心式聯接件)	CQVM2.5/2	50	CQVM2.5/2	50	CQV 4/2	50
		50		50	CQV 4/3	50
		50		50	CQV 4/4	50
		20		20	CQV 4/10	20
Comb Link (邊接式聯接件)	CQB2.5/2	50	CQB2.5/2	50	CQB 4/2	50
		50		50	CQB 4/3	50
		20		20	CQB 4/10	20
Warning Cover (安全標示蓋)	-	50	-	50	WSS4	50
Marking Tags (標記號)	W5	500	W5	500	W6 W6Z W6K	500
Test plug (測試插頭)	-	20	-	20	TPS2.3 (Ø2.3)	20
Socket (測試插孔)	-	50	-	50	TP2.3	50
Protection Cover (防觸蓋)	-	20	-	20	DP1	20
Retaining Plates (中隔板)	-	50	-	50	AD1	50
Tool (工具)	DS3		DS3		DS3	

CDU 4/3N


CDU 4/4N

CDU 6N




Specifications (產品規格)	4 mm ²	4 mm ²	6 mm ²			
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size			
UL	300V/30A/AWG 10-24	300V/30A/AWG 10-24	 600 V / 50 A / AWG 8-26			
CSA	300V/30A/AWG 10-24	300V/30A/AWG 10-24	600 V / 50 A / AWG 8-26			
IEC	500V/32A/0.2-4mm ²	500V/32A/0.2-4mm ²	800V/57A/0.5-6mm ²			
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	8KV / 3	8KV / 3			
Torque (lb-in) (扭緊力矩)	7	7	14			
Clamping Screw (M) (螺絲)	M3	M3	M4			
Insulation stripping length(mm) (剝線長度)	8 mm	8 mm	10-12 mm			
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)			
For TS35x7.5 	6.2/50.5/47	6.2/63.5/47	8 x 42.5 x 47			
For TS35x15 	6.2/50.5/54.5	6.2/63.5/54.5	8 x 42.5 x 54.5			
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.		
End Bracket (終端擋板) 	CEW35/2 SEW35	50 50	CEW35/2 SEW35	50 50	SEW35 CEW35/2	50 50
End Plate (擋板) 	CDU4/3-C	50	CDU4/4-C	50	CEP 6	50
Partition (擋板 / 隔片) 	-	50	-	50	CEP 6	50
Cross Jumper (中心式聯接件) 	CQVM4/2	50	CQVM4/2	50	CQV 6/2	50
		50		50	CQV 6/3	50
		50		50	CQV 6/4	50
		20		20	CQV 6/10	20
		50		50	CQB-6/2	50
Comb Link (邊接式聯接件) 	CQB4/2	50	CQB4/2	50	CQB-6/3	50
		20		20	CQB-6/10	20
					WSS6	50
Warning Cover (安全標示蓋) 	-	50	-	50		
MarkingTags (標記號) 	W6	500	W6	500	W6 W6Z W6K	500
Test plug (測試插頭) 	-	20	-	20	TPS2.3 (Ø2.3)	20
					TPS4 (Ø4)	20
Socket (測試插孔) 	-	50	-	50	TP2.3	50
					TP4	50
Protection Cover (防觸蓋) 	-	20	-	20	DP1	20
Retaining Plates (中界板) 	-	50	-	50	AD1	50
Tool (工具) 	DS3		DS3		DS4	


CDU 10N



CDU 2.5M




CDU 4M





Specifications (產品規格)	10 mm ²	2.5 mm ²	4 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	600 V/65 A/AWG 6-24	300V/20A/AWG 12-22	300V/30A/AWG 10-22
CSA	600 V/65 A/AWG 6-24	300V/20A/AWG 12-22	300V/30A/AWG 10-22
IEC	800V/76A/0.5-10mm ²	400V/24A/0.2-2.5mm ²	500V/30/0.5-4mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3	6KV / 3	6KV / 3
Torque (lb-in) (扭緊力矩)	19	7	7.7
Clamping Screw (M) (螺絲)	M4	M2.6	M3
Insulation stripping length(mm) (剝線長度)	10-12 mm	6 mm	6mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	10 x 42.5 x 47		
For TS15x5.5	10 x 42.5 x 54.5	5x 28 x 33	6x 28 x 33
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50 CEW35/2 50	CEW 15 50	CEW 15 50
End Plate (擋板)	CEP 6 50	CEP 7 50	CEP 7 50
Partition (擋板/隔片)	CEP 6 50		
Cross Jumper (中心式聯接件)	CQV 10/2 50 CQV 10/3 50 CQV 10/4 50 CQV 10/10 20	CQVM 2.5/2 50 CQVM 2.5/3 50 CQVM 2.5/10 50	CQVM 4/2 50 CQVM 4/3 50 CQVM 4/10 50
Comb Link (邊接式聯接件)	CQB-10/2 50 CQB-10/3 50 CQB-10/10 20	CQB 2.5/2 50 CQB 2.5/3 50	CQB 4/2 50 CQB 4/3 50
Warning Cover (安全標示蓋)	WSS 10 50		
Marking Tags (標記號)	W6 W6Z W6K 500	W5 W5Z W5K 500	W6 W6Z W6K 500
Test plug (測試插頭)	TPS2.3 (Ø2.3) 20 TPS4 (Ø4) 20		
Socket (測試插孔)	TP2.3 50 TP4 50		
Protection Cover (防觸蓋)	DP1 20		
Retaining Plates (中界板)	AD1 50		
Tool (工具)	DS4	DS3	DS3

Features of Screw Ground Terminal Blocks

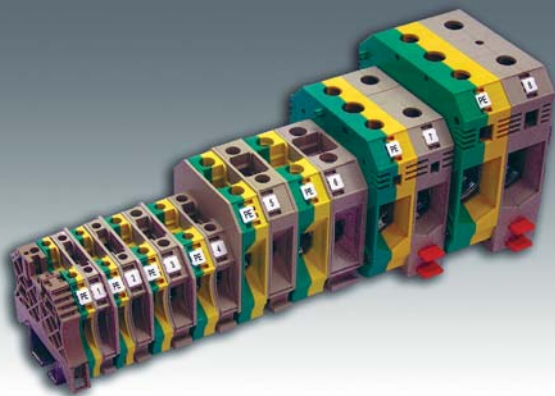

CPE 2.5



Features of Screw Ground Terminal Blocks



- Very low contact resistance accordance with ground connections in wiring systems of international standards.
- Green-yellow color connection coding was followed by DECA's ground terminal blocks.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Easy mounting and dismantling from the terminal rail.

接地型接線座之特性



- 極低的接觸阻抗，符合嚴格的地線連接國際標準規範
- 進聯的接地端子連結設計，符合綠色-黃色相間的國際標準規範
- 容易擴充及延伸性佳
- 操作簡易且連結處安全性高
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 接線座從軌道上安裝及拆卸容易

Specifications（產品規格）	2.5 mm ²	
Technical Data（技術參數）	Rated voltage/Rated current/Wire size	
UL		AWG 12-26
CSA	AWG 12-26	
IEC	0.5-2.5 mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree /污染等級)	8KV / 3	
Torque (lb-in) (扭緊力矩)	7	
Clamping Screw (M) (螺絲)	M3	
Insulation stripping length(mm) (剝線長度)	10-14 mm	
Material/Available Color (材質顏色)		
Rail Dimensions（導軌尺寸）	T / W / H (mm)	
For TS35x7.5 	5 x 57 x 47.5	
For TS35x15 	5 x 57 x 55	
Accessories（附件）	Cat. No.	Qty.
End Bracket（終端擋板） 	SEW35	50
	CEW35/2	50
Comb Link（邊接式聯接件） 	CQB 2.5/2	50
	CQB 2.5/3	50
	CQB 2.5/10	20
MarkingTags（標記號） 	W5 W5Z W5K	500
	W7 W7Z W7K	400
Protection Cover（防觸蓋） 	DP1	20
Retaining Plates（中界板） 	AD1	50
Tool（工具） 	DS3	


CPE 4



CPE 6




CPE 10




Specifications (產品規格)	4 mm ²	6 mm ²	10 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	AWG 10-26	AWG 8-26	AWG 6-16
CSA	AWG 10-26	AWG 8-26	AWG 6-16
IEC	0.5-4mm ²	0.5-6mm ²	1.5-10mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	8KV / 3
Torque (lb-in) (扭緊力矩)	8.5	16	18
Clamping Screw (M) (螺絲)	M3	M4	M4
Insulation stripping length(mm) (剝線長度)	10-14 mm	12-16 mm	12-16 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	6 x 57 x 47.5	8 x 57 x 47.5	10 x 57 x 47.5
For TS35x15	6 x 57 x 55	8 x 57 x 55	10 x 57 x 55
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
	CEW35/2 50	CEW35/2 50	CEW35/2 50
Comb Link (連接式聯接件)	CQB 4/2 50	CQB 6/2 50	CQB 10/2 50
	CQB 4/3 50	CQB 6/3 50	CQB 10/3 50
	CQB 4/10 20	CQB 6/10 20	CQB 10/4 20
MarkingTags (標記號)	W6 W6Z W6K 500	W6 W6Z W6K 500	W6 W6Z W6K 500
	W8 W8Z W8K 400	W8 W8Z W8K 400	W8 W8Z W8K 400
Protection Cover (防觸蓋)	DP1 20	DP1 20	DP1 20
Retaining Plates (中界板)	AD1 50	AD1 50	AD1 50
Tool (工具)	DS3	DS4	DS4


CPE 16



CPE 35



CPE 50






Specifications (產品規格)	16 mm ²	35 mm ²	50 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	AWG 6-14	AWG 2-10	AWG 1/0-6
CSA	AWG 6-14	AWG 2-10	AWG 1/0-6
IEC	2.5-16mm ²	4-35mm ²	16-50mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	8KV / 3
Torque (lb-in) (扭緊力矩)	35	51	70
Clamping Screw (M) (螺絲)	M5	M6	M6
Insulation stripping length(mm) (剝線長度)	14-18 mm	14-18 mm	20-25 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	12 x 57 x 63.5	16 x 57 x 63.5	20 x 70.5 x 76
For TS35x15	12 x 57 x 71	16 x 57 x 71	20 x 70.5 x 83.5
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
	CEW35/1 50	CEW35/1 50	CEW35/1 50
Comb Link (連接式聯接件)			
MarkingTags (標記號)	W6 W6Z W6K 500	W6 W6Z W6K 500	W6 W6Z W6K 500
	W8 W8Z W8K 400	W8 W8Z W8K 400	W8 W8Z W8K 400
Protection Cover (防觸蓋)	DP1 20	DP1 20	
Retaining Plates (中界板)	AD2 50	AD2 50	
Tool (工具)	DS5	S6	DS5 DS6

CPE 95



CPE 2.5N

CPE 2.5/3N




Specifications (產品規格)	95 mm ²	2.5 mm ²	2.5 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	 AWG 4/0-2	AWG 12-26	AWG 12-24
CSA	AWG 4/0-2	AWG 12-26	AWG 12-24
IEC	35-95mm ²	0.2-2.5mm ²	0.2-2.5mm ²
Insulating impulse voltage withstand (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	6KV / 3
Torque (lb-in) (扭緊力矩)	90	7	7
Clamping Screw (M) (螺絲)	M8	M3	M2.6
Insulation stripping length(mm) (剝線長度)	30-35 mm	10-14 mm	8 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5 	25 x 80 x 90	5 x 42.5 x 47.5	5.2x50.5x47
For TS35x15 	25 x 80 x 97.5	5 x 57 x 55	5.2x50.5x54.5
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板) 	SEW35 50	SEW35 50	CEW35/2 50
	CEW35/1 50	CEW35/2 50	SEW35 50
Comb Link (連接式聯接件) 	CQB 95/2 50	CQB 2.5/2 50	CQB2.5/2 50
	CQB 95/3 50	CQB 2.5/3 50	
		CQB 2.5/10 20	
MarkingTags (標記號) 	W6 W6Z W6K 500	W5 W5Z W5K 500	W5 W5Z W5K 500
	W8 W8Z W8K 400	W7 W7Z W7K 400	
Protection Cover (防觸蓋) 		DP1 20	
Retaining Plates (中界板) 		AD1 50	
Tool (工具) 	DS6 DS8	DS3	DS3


CPE 4N



CPE 4/3N




CPE 6N




Specifications (產品規格)	4 mm ²		4 mm ²		6 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	AWG 10-26		AWG 10-24		AWG 8-26	
CSA	AWG 10-26		AWG 10-24		AWG 8-26	
IEC	0.2-4mm ²		0.2-4mm ²		0.2-6mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3		6KV / 3		8KV / 3	
Torque (lb-in) (扭緊力矩)	8.5		8		16	
Clamping Screw (M) (螺絲)	M3		M3		M4	
Insulation stripping length(mm) (剝線長度)	10-14 mm		8 mm		12-16 mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	6 x 42.5 x 47.5		6.2x50.5x47		8 x 42.5 x 47.5	
For TS35x15	6 x 57 x 55		6.2x50.5x54.5		8 x 57 x 55	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	CEW35/2	50	SEW35	50
	CEW35/2	50	SEW35	50	CEW35/2	50
Comb Link (連接式聯接件)	CQB 4/2	50		50	CQB 6/2	50
	CQB 4/3	50	CQB4/2	50	CQB 6/3	50
	CQB 4/10	20		20	CQB 6/10	20
MarkingTags (標記號)	W6 W6Z W6K	500	W6 W6Z W6K	500	W6 W6Z W6K	500
	W8 W8Z W8K	400			W8 W8Z W8K	400
Protection Cover (防觸蓋)	DP1	20			DP1	20
Retaining Plates (中界板)	AD1	50			AD1	50
Tool (工具)	DS3		DS3		DS4	

CPE 10N




Specifications (產品規格)	10 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	AWG 6-16	
CSA	AWG 6-16	
IEC	0.5-4mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3	
Torque (lb-in) (扭緊力矩)	18	
Clamping Screw (M) (螺絲)	M4	
Insulation stripping length(mm) (剝線長度)	12-16 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	10 x 42.5 x 47.5	
For TS35x15	10 x 57 x 55	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
	CEW35/2	50
Comb Link (連接式聯接件)	CQB 10/2	50
	CQB 10/3	50
	CQB 10/4	20
MarkingTags (標記號)	W6 W6Z W6K	500
	W8 W8Z W8K	400
Protection Cover (防觸蓋)	DP1	20
Retaining Plates (中界板)	AD1	50
Tool (工具)	DS4	

Features of Screw Double Level Terminal Blocks

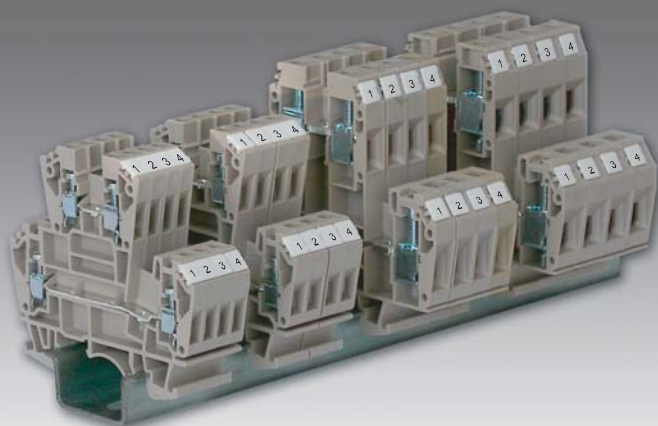

CDK 2.5



Features of Screw Double Level Terminal Blocks


- Double wiring design available without extension of mounting rail.
- Marking / Identification by marking tags possible at both levels .
- Interconnection / shorting possibility at both levels.
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Very low contact resistance.
- Easy mounting and dismantling from the terminal rail.
- Reduce the installation costs and speed the wiring.

雙層型接線座之特性


- 雙層接線設計可節省軌道延伸空間
- 可擴充標籤及識別至端子組之雙層
- 上下兩層端子間可供交互連結及短接功能之用
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 極低的接觸阻抗
- 接線座從軌道上安裝及拆卸容易
- 降低裝置成本及可快速接線

Specifications (產品規格)		2.5 mm ²	
Technical Data (技術參數)		Rated voltage/Rated current/Wire size	
UL		cUL [®] 600 V/20 A/AWG 12-22	
CSA		600 V/20 A/AWG 12-22	
IEC		800 V/24 A/0.5-2.5mm ²	
Insulating impulse voltage withstand (額定衝擊電壓)		8KV / 3	
Torque (lb-in)	(扭緊力矩)	5	
Clamping Screw (M)	(螺絲)	M2.6	
Insulation stripping length(mm)	(剝線長度)	6 mm	
Material/Avaliable Color (材質顏色)			
Rail Dimensions (導軌尺寸)		T / W / H (mm)	
For TS35x7.5		5 x 69 x 63.5	
For TS35x15		5 x 69 x 71	
Accessories (附件)		Cat. No.	Qty.
End Bracket (終端擋板)		SEW35	50
		CEW35/2	50
End Plate (擋板)		CEP 3	50
		CQV 2.5/2	50
Cross Jumper (中心式聯接件)		CQV 2.5/3	50
		CQV 2.5/4	50
		CQV 2.5/10	20
		CQB 2.5/2	50
Comb Link (邊接式聯接件)		CQB 2.5/3	50
		CQB 2.5/10	20
		WSS-2.5	50
Warning Cover (安全標示蓋)		W5 Z	500
MarkingTags (標記號)		W5 K	500
Protection Cover (防觸蓋)			
Retaining Plates (中界板)			
Tool (工具)		DS3	


CDK 4



CDK 6




CDK 10




Specifications (產品規格)	4 mm ²	6 mm ²	10 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	c 600 V/30 A/AWG 10-22	c 600 V/41 A/AWG 8-20	c 600 V/65 A/AWG 6-16
CSA	600 V/30 A/AWG 10-22	600 V/41 A/AWG 8-20	600 V/65 A/AWG 6-16
IEC	800V/32A/0.5-4mm ²	500V/50A/0.5-6mm ²	500V/76A/1.5-10mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	6KV / 3	8KV / 3	8KV / 3
Torque (lb-in) (扭緊力矩)	8	14	19
Clamping Screw (M) (螺絲)	M3	M4	M4
Insulation stripping length(mm) (剝線長度)	6 mm	10-12 mm	10-12 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	6 x 69 x 63.5	8 x 69 x 73	10 x 69 x 73
For TS35x15	6 x 69 x 71	8 x 69 x 80.5	10 x 69 x 80.5
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50 CEW35/2 50	SEW35 50 CEW35/2 50	SEW35 50 CEW35/2 50
End Plate (擋板)	CEP 3 50	CEP4 50	CEP 4 50
Cross Jumper (中心式聯接件)	CQV 4/2 50 CQV 4/3 50 CQV 4/4 50 CQV 4/10 20	CQV 6/2 50 CQV 6/3 50 CQV 6/4 50 CQV 6/10 20	CQV 10/2 50 CQV 10/3 50 CQV 10/4 50 CQV 10/10 20
Comb Link (邊接式聯接件)	CQB 4/2 50 CQB 4/3 50 CQB 4/10 20	CQB-6/2 50 CQB-6/3 50 CQB-6/10 20	CQB-10/2 50 CQB-10/3 50 CQB-10/10 20
Warning Cover (安全標示蓋)	WSS-4 50	WSS-6 50	WSS-10 50
Marking Tags (標記號)	W6 Z 500 W6 K 500	W6 Z 500 W6 K 500	W6 Z 500 W6 K 500
Protection Cover (防觸蓋)			
Retaining Plates (中界板)			
Tool (工具)	DS3	DS4	DS4

Features of Screw Double Level Terminal Blocks

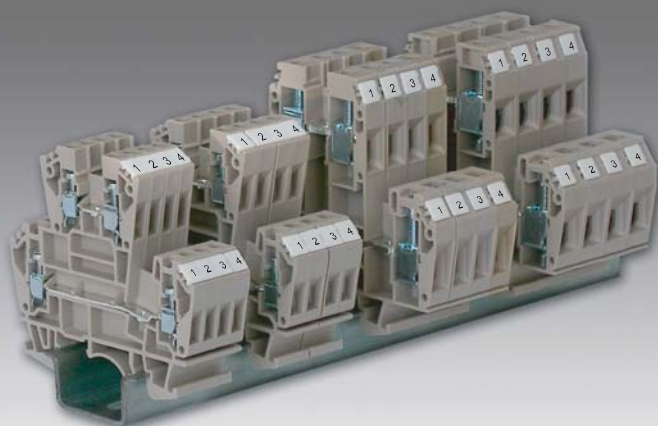

CDK 2.5V



Features of Screw Double Level Terminal Blocks


- Double wiring design available without extension of mounting rail.
- Marking / Identification by marking tags possible at both levels .
- Interconnection / shorting possibility at both levels.
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Very low contact resistance.
- Easy mounting and dismantling from the terminal rail.
- Reduce the installation costs and speed the wiring.

雙層型接線座之特性

- 雙層接線設計可節省軌道延伸空間
- 可擴充標籤及識別至端子組之雙層
- 上下兩層端子間可供交互連結及短接功能之用
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 極低的接觸阻抗
- 接線座從軌道上安裝及拆卸容易
- 降低裝置成本及可快速接線

Specifications (產品規格)		2.5 mm ²	
Technical Data (技術參數)		Rated voltage/Rated current/Wire size	
UL		600V/20A/AWG 12-22	
CSA		600V/20A/AWG 12-22	
IEC		800 V/24 A/0.5-2.5mm ²	
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)		6KV / 3	
Torque (lb-in) (扭緊力矩)		5	
Clamping Screw (M) (螺絲)		M2.6	
Insulation stripping length(mm) (剝線長度)		6 mm	
Material/Avaliable Color (材質顏色)			
Rail Dimensions (導軌尺寸)		T / W / H (mm)	
For TS35x7.5		5 x 69 x 63.5	
For TS35x15		5 x 69 x 71	
Accessories (附件)		Cat. No.	Qty.
End Bracket (終端擋板)		CEW35/2	50
		SEW35	50
End Plate (擋板)		CEP3	50
Cross Jumper (中心式聯接件)		CQV2.5/2	50
		CQV2.5/3	50
		CQV2.5/4	50
Comb Link (邊接式聯接件)		CQB2.5/2	50
		CQB2.5/3	50
		CQB2.5/4	20
Warning Cover (安全標示蓋)		W5 W5Z W5K	50
MarkingTags (標記號)			
Protection Cover (防觸蓋)		DP1	20
Retaining Plates (中界板)			
Tool (工具)		DS3	


CDK 4V



CDK 6V




CDK 10V




Specifications (產品規格)	4 mm ²	6 mm ²	10 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	600 V/30 A/AWG 10-22	600 V/41 A/AWG 8-20	600 V/65 A/AWG 6-16
CSA	600 V/30 A/AWG 10-22	600 V/41 A/AWG 8-20	600 V/65 A/AWG 6-16
IEC	800V/32A/0.5-4mm ²	500V/50A/0.5-6mm ²	500V/76A/1.5-10mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	8KV / 3	8KV / 3
Torque (lb-in) (扭緊力矩)	8	14	19
Clamping Screw (M) (螺絲)	M3	M4	M4
Insulation stripping length(mm) (剝線長度)	6 mm	10-12 mm	10-12 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	6 x 69 x 63.5	8 x 69 x 73	10 x 69 x 73
For TS35x15	6 x 69 x 71	8 x 69 x 80.5	10 x 69 x 80.5
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	CEW35/2 50 SEW35 50	CEW35/2 50 SEW35 50	CEW35/2 50 SEW35 50
End Plate (擋板)	CEP3 50	CEP4 50	CEP4 50
Cross Jumper (中心式聯接件)	CQV4/2 50 CQV4/3 50 CQV4/4 50	CQV6/2 50 CQV6/3 50 CQV6/4 50	CQV10/2 50 CQV10/3 50 CQV10/4 50
Comb Link (邊接式聯接件)	CQB4/2 50 CQB4/3 50 CQB4/4 20	CQB6/2 50 CQB6/3 50 CQB6/4 20	CQB10/2 50 CQB10/3 50 CQB10/4 20
Warning Cover (安全標示蓋)	W5 W5Z W5K 500	W6 W6Z W6K 500	W6 W6Z W6K 500
Marking Tags (標記號)			
Protection Cover (防觸蓋)	DP1 20		
Retaining Plates (中界板)			
Tool (工具)	DS3	DS4	DS4

Screw Disconnect Terminal Blocks

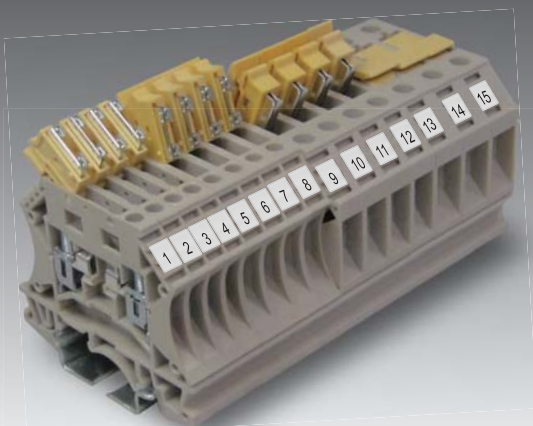

CTR 2.5



Features of Disconnect Terminal Blocks (CTR2.5/4/6/10)


- High current carrying capacity up to 15A .
- Space – saving design.
- Installing terminal plug easily and quickly on the terminal rails (Ease of circuit testing & diagnosis).
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- Stable and low contact resistances.
- Easy mounting and dismantling from the terminal rail.

分離型接線座之特性 (CTR2.5/4/6/10)


- 高電流承載能力
- 節省空間之設計
- 端子插頭安裝及更換容易 (有利於測試及診斷)
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 低且穩定的接觸電阻
- 接線座從軌道上安裝及拆卸容易

Specifications（產品規格）		2.5 mm ²	
Technical Data（技術參數）		Rated voltage/Rated current/Wire size	
UL		cUL [®] 600 V / 12 A/AWG 12-22	
CSA		600 V / 12 A/AWG 12-22	
IEC		500V/15A/0.5-2.5 mm ²	
Insulating impulse voltage withstand（額定衝擊電壓 /Pollution degree /污染等級）		6KV / 3	
Torque（lb-in）（扭緊力矩）		4.5	
Clamping Screw（M）（螺絲）		M3	
Insulation stripping length（mm）（剝線長度）		10-12 mm	
Material/Available Color（材質顏色）			
Rail Dimensions（導軌尺寸）		T / W / H（mm）	
For TS35x7.5 		5 x 60 x 47.5	
For TS35x15 		5 x 60 x 55	
Accessories（附件）		Cat. No.	Qty.
End Bracket（終端擋板） 		SEW35	50
		CEW35/2	50
End Plate（擋板） 		CEP 1	50
Partition（擋板／隔片） 		CEP 5	50
		CQB 2.5/2	50
Comb Link（連接式聯接件） 		CQB 2.5/3	50
		CQB 2.5/10	20
MarkingTags（標記號） 		W5 W5Z W5K	500
		W7 W7Z W7K	400
Test plug（測試插頭） 		TPS2.0（Ø2）	20
		TPS2.3（Ø2.3）	20
Socket（測試插孔） 		TP2.0	50
		TP2.3	50
Diode Plug（二極體插頭）	+  -	CSD2.5	25
	-  +	CSD2.5	25
LED Fuse Type（顯示型保險絲插座） Insert 			
Protection Cover（防觸蓋） 		DP1	20
Retaining Plates（中界板） 		AD1	50
Tool（工具） 		DS3	


CTR 4



CTR 6





CTR 10





Specifications (產品規格)	4 mm ²	6 mm ²	10 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	600 V/22 A/AWG 10-22	600 V/24 A/AWG 8-22	600 V/40 A/AWG 6-22
CSA	600 V/22 A/AWG 10-22	600 V/24 A/AWG 8-22	600 V/40 A/AWG 6-22
IEC	800 V/22 A/0.5-4mm ²	630V/24 A/0.5-6mm ²	630 V/40 A/1.5-10mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree 污染等級)	6KV/3	8KV/3	8KV/3
Torque (lb-in) (扭緊力矩)	6	14	19
Clamping Screw (M) (螺絲)	M3	M4	M4
Insulation stripping length(mm) (剝線長度)	10-12 mm	12-14 mm	12-14 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	6x60x47.5	8x60x47.5	10x60x47.5
For TS35x15	6x60x55	8x60x55	10x60x55
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50 CEW35/2 50	SEW35 50 CEW35/2 50	SEW35 50 CEW35/2 50
End Plate (擋板)	CEP 1 50	CEP 5 50	CEP 5 50
Partition (擋板/隔片)	CEP 5 50		
Comb Link (連接式聯接件)	CQB 4/2 50 CQB 4/3 50 CQB 4/10 20	CQB 6/2 50 CQB 6/3 50 CQB 6/10 20	CQB 10/2 50 CQB 10/3 50 CQB 10/10 20
Marking Tags (標記號)	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 400
Test plug (測試插頭)	—	—	—
Socket (測試插孔)	—	—	—
Diode Plug (二極體插頭)	CSD4 25 CSD4 25	CSD6 25 CSD6 25	CSD10 25 CSD10 25
LED Fuse Type (顯示型保險絲插座) Insert	CSI4 25	CSI6 25	CSI10 25
Protection Cover (防觸蓋)	DP1 20	DP1 20	DP1 20
Retaining Plates (中界板)	AD1 50	AD1 50	AD1 50
Tool (工具)	DS3	DS4	DS4

CTR 4/4




Specifications (產品規格)	4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	600 V / 12 A / AWG 10-22	
CSA	600 V / 12 A / AWG 10-22	
IEC	800 V / 32 A / 0.5-4mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	6KV / 3	
Torque (lb-in) (扭緊力矩)	7	
Clamping Screw (M) (螺絲)	M3	
Insulation stripping length(mm) (剝線長度)	9-10 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	6 X 66 X 50.5	
For TS35x15	6 X 66 X 58	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
	CEW35/2	50
End Plate (擋板)	CTR 4/4C	50
Partition (擋板/隔片)	CEP 5	50
Comb Link (連接式聯接件)	CQB 4/2	50
	CQB 4/3	50
	CQB 4/10	20
MarkingTags (標記號)	W6 W6Z W6K	500
Test plug (測試插頭)	-	-
Socket (測試插孔)	-	-
Diode Plug (二極體插頭)	+ -	CSD4 25
	- +	CSD4 25
LED Fuse Type (顯示型保險絲插座) Insert	CSI4	25
Protection Cover (防觸蓋)	DP1	20
Retaining Plates (中隔板)	AD1	50
Tool (工具)	DS3	

CTR 10SF




Specifications (產品規格)	10 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	600 V / 6.3 A / AWG 6-22	
CSA	600 V / 6.3 A / AWG 6-22	
IEC	660 V / 6.3 A / 1.5-10mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3	
Torque (lb-in) (扭緊力矩)	19	
Clamping Screw (M) (螺絲)	M4	
Insulation stripping length(mm) (剝線長度)	12-14 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	12 X 61.6 X 47.5	
For TS35x15	12 X 61.6 X 55	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
	CEW35/2	50
End Plate (擋板)	CTR 10SF-C	50
Partition (擋板/隔片)	CQV 10/2	50
	CQV 10/3	50
	CQV 10/4	20
Comb Link (連接式聯接件)	CQB 10/2	50
	CQB 10/3	50
	CQB 10/10	20
MarkingTags (標記號)	-	-
Test plug (測試插頭)	-	-
Socket (測試插孔)	-	-
Tool (工具)	DS4	

Screw Disconnect Terminal Blocks

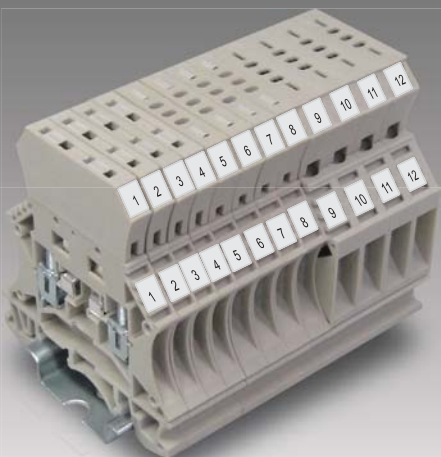

CTR 2.5D




Features of Disconnect(Diode) Terminal Blocks (CTR2.5D/4D/6D/10D)


- Installing the diode plug easily and quickly on the terminal rails(Ease of fault finding).
- Various diode circuits are available for different application.
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- Stable and low contact resistances.
- Easy mounting and dismantling from the terminal rail.

分離型(內接二極體)接線座之特性 (CTR2.5D/4D/6D/10D)


- 二極體插頭安裝及更換容易 (有利於故障診斷)
- 適用不同之二極體電路及應用類型
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 低且穩定的接觸電阻
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)		2.5 mm ²	
Technical Data (技術參數)		Rated voltage/Rated current/Wire size	
UL		c  US 600 V/ 2A/AWG 12-22	
CSA		600 V/ 2A/AWG 12-22	
IEC		400 V/2 A/0.5-2.5mm ²	
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)		6KV / 3	
Torque (lb-in) (扭緊力矩)		4.5	
Clamping Screw (M) (螺絲)		M3	
Insulation stripping length(mm) (剝線長度)		10-12 mm	
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)		T / W / H (mm)	
For TS35x7.5 		5 x 60 x 47.5 +18(CSD2.5)	
For TS35x15 		5 x 60 x 55 +18(CSD2.5)	
Accessories (附件)		Cat. No.	Qty.
End Bracket (終端擋板) 		SEW35	50
		CEW35/2	50
End Plate (擋板) 		CEP 1	50
Partition (擋板 / 隔片) 		CEP 2	50
Comb Link (連接式聯接件) 		CQB 2.5/2	50
		CQB 2.5/3	50
		CQB 2.5/10	20
MarkingTags (標記號) 		W5 W5Z W5K	500
		W7 W7Z W7K	400
Test plug (測試插頭) 		—	
Socket (測試插孔) 		—	
Diode Plug (二極體插頭)	+  -	CSD2.5	25
	-  +	CSD2.5	25
LED Fuse Type (顯示型保險絲插座) Insert 			
Protection Cover (防觸蓋) 		DP1	20
Retaining Plates (中界板) 		AD2	50
Tool (工具) 		DS3	


CTR 4D



CTR 6D




CTR 10D




Specifications (產品規格)	4 mm ²	6 mm ²	10 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	c 600 V / 2A / AWG 12-22	600 V / 3A / AWG 12-22	600 V / 3A / AWG 12-22
CSA	600 V / 2A / AWG 12-22	600 V / 3A / AWG 12-22	600 V / 3A / AWG 12-22
IEC	800 V / 2A / 0.5-4mm ²	500 V / 3A / 0.5-6mm ²	500 V / 3A / 1.5-10mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	8KV / 3	8KV / 3
Torque (lb-in) (扭緊力矩)	6	14	19
Clamping Screw (M) (螺絲)	M3	M4	M4
Insulation stripping length(mm) (剝線長度)	10-12 mm	12-14 mm	12-14 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	6x 60 x 47.5 +18(CSD4)	8 x 60 x 47.5 + 18(CSD6)	10x 60 x 47.5 + 18(CSD10)
For TS35x15	6 x 60 x 55 +18(CSD4)	8 x 60 x 55 + 18(CSD6)	10 x 60 x 55 + 18(CSD10)
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50 CEW35/2 50	SEW35 50 CEW35/2 50	SEW35 50 CEW35/2 50
End Plate (擋板)	CEP 1 50	CEP 5 50	CEP 5 50
Partition (擋板/隔片)	CEP 2 50	CEP 2 50	CEP 2 50
Comb Link (連接式聯接件)	CQB 4/2 50 CQB 4/3 50 CQB 4/10 20	CQB 6/2 50 CQB 6/3 50 CQB 6/10 20	CQB 10/2 50 CQB 10/3 50 CQB 10/10 20
Marking Tags (標記號)	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 400
Test plug (測試插頭)	—	—	—
Socket (測試插孔)	—	—	—
Diode Plug (二極體插頭)	CSD4 25 CSD4 25	CSD6 25 CSD6 25	CSD10 25 CSD10 25
LED Fuse Type (顯示型保險絲插座) Insert	CSI4 25	CSI6 25	CSI10 25
Protection Cover (防觸蓋)	DP1 20	DP1 20	DP1 20
Retaining Plates (中界板)	AD2 50	AD2 50	AD2 50
Tool (工具)	DS3	DS4	DS4

Screw Disconnect Terminal Blocks

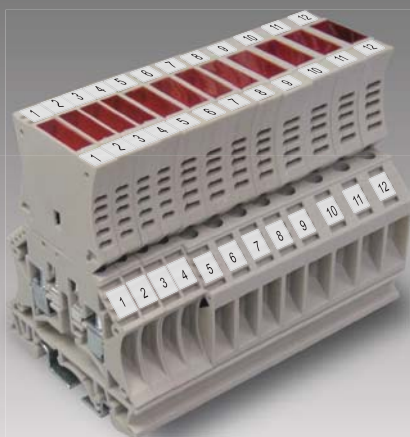

CTR 4SI



Features of Fuse Terminal Blocks (CTR4SI/6SI/10SI)


- Fuse terminal blocks can be used to fit fuses easily and quickly on the terminal rails (Ease of fault finding).
- Components as sensors, power supply units and conductors are protected by installing different fuses. (when the current flows through them).
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- Stable and low contact resistances.
- Easy mounting and dismounting from the terminal rail.

保險絲型接線座之特性 (CTR4SI/6SI/10SI)


- 保險絲安裝及更換容易 (有利於故障診斷)
- 保護元件避免受電流衝擊而損毀
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 低且穩定的接觸電阻
- 接線座從軌道上安裝及拆卸容易

Specifications（產品規格）		4 mm ²	
Technical Data（技術參數）		Rated voltage/Rated current/Wire size	
UL		C _{UL} [®] 400V/15A/AWG 14-22	
CSA		400V/15A/AWG 14-22	
IEC		400V/15A/0.5-4 mm ²	
Insulating impulse voltage withstand（額定衝擊電壓） /Pollution degree（污染等級）		6KV / 3	
Torque（lb-in）（扭緊力矩）		6	
Clamping Screw（M）（螺絲）		M3	
Insulation stripping length(mm)（剝線長度）		10-12 mm	
Material/Available Color（材質顏色）			
Rail Dimensions（導軌尺寸）		T / W / H（mm）	
For TS35x7.5		6 x 60 x 47.5 + 31.5(CSI4)	
For TS35x15		6 x 60 x 55 + 31.5(CSI4)	
Accessories（附件）		Cat. No.	Qty.
End Bracket（終端擋板）		SEW35	50
		CEW35/2	50
End Plate（擋板）		CEP 1	50
Partition（擋板／隔片）		CEP 2	50
Comb Link（連接式聯接件）		CQB 4/2	50
		CQB 4/3	50
		CQB 4/10	20
MarkingTags（標記號）		W6 W6Z W6K	500
		W8 W8Z W8K	400
Test plug（測試插頭）		—	
Socket（測試插孔）		—	
Diode Plug（二極體插頭）	+  —	CSD4	25
	—  +	CSD4	25
LED Fuse Type（顯示型保險絲插座） Insert 		CSI4	25
Protection Cover（防觸蓋） 		—	
Retaining Plates（中隔板） 		—	
Tool（工具） 		DS3	



CTR 6SI



CTR 10SI





CTR4SI-EN




Specifications (產品規格)	6 mm ²	10 mm ²	4 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	400 V/20A/AWG 8-20	400 V/ 20 A/AWG 6-16	600 V / 7.5A/AWG 10-22
CSA	400 V/20A/AWG 8-20	400 V/ 20 A/AWG 6-16	600 V / 7.5A/AWG 10-22
IEC	500V/20A/0.5-6 mm ²	500 V/20 A/1.5-10mm ²	800 V / 10A /0.5-4mm ²
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	8KV / 3	8KV / 3	6KV / 3
Torque (lb-in) (扭緊力矩)	14	19	7.7
Clamping Screw (M) (螺絲)	M4	M4	M3
Insulation stripping length(mm) (剝線長度)	12-14 mm	12-14 mm	10-12mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	8 x 60 x 47.5 + 31.5(CSI6)	10 x 60 x 47.5 + 31.5(CSI10)	8 x 60 x 54.5
For TS35x15	8 x 60 x 55 + 31.5(CSI6)	10 x 60 x 55 + 31.5(CSI10)	8 x 60 x 62
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50 CEW35/2 50	SEW35 50 CEW35/2 50	SEW 35 50 CEW 35/2 50
End Plate (擋板)	CEP 5 50	CEP 5 50	CEP 5 50
Partition (擋板/隔片)	CEP 2 50	CEP 2 50	
Comb Link (邊接式聯接件)	CQB 6/2 50 CQB 6/3 50 CQB 6/10 20	CQB 10/2 50 CQB 10/3 50 CQB 10/10 20	CQB 6/2 50 CQB 6/3 50 CQB 6/10 50
MarkingTags (標記號)	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 500
Test plug (測試插頭)	—	—	—
Socket (測試插孔)	—	—	—
Diode Plug (二極體插頭)	CSD6 25	CSD10 25	
LED Fuse Type (顯示型保險絲插座) Insert	CSI6 25	CSI10 25	
Protection Cover (防觸蓋)	—	—	—
Retaining Plates (中界板)	—	—	—
Tool (工具)	DS4	DS4	DS3

CTR 4SB




CTR 4SF




Specifications (產品規格)	4 mm ²		4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	cUL [®] 600 V / 16A/AWG 12-22		cUL [®] 600 V / 15A/AWG 14-22	
CSA	600 V / 16A/AWG 12-22		600 V / 15A/AWG 14-22	
IEC	800 V / 10A /0.5-4mm ²		800 V / 10A /0.5-4mm ²	
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	6KV / 3		6KV / 3	
Torque (lb-in) (扭緊力矩)	6		6	
Clamping Screw (M) (螺絲)	M3		M3	
Insulation stripping length(mm) (剝線長度)	10-12mm		10-12mm	
Material/Available Color (材質顏色)				
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	8 x 60 x 54.5		8 x 60 x 54.5	
For TS35x15	8 x 60 x 62		8 x 60 x 62	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW 35 CEW 35/2	50 50	SEW 35 CEW 35/2	50 50
End Plate (擋板)	CEP 5	50	CEP 5	50
Partition (擋板/隔片)				
Comb Link (連接式聯接件)	CQB 6/2 CQB 6/3 CQB 6/10	50 50 50	CQB 6/2 CQB 6/3 CQB 6/10	50 50 50
MarkingTags (標記號)	W6 W6Z W6K W8 W8Z W8K	500 500	W6 W6Z W6K W8 W8Z W8K	500 500
Test plug (測試插頭)	—	—	—	—
Socket (測試插孔)	—	—	—	—
Diode Plug (二極體插頭)	CSD4	25	CSD4	25
LED Fuse Type (顯示型保險絲插座) Insert	CSI4	25	CSI4	25
Protection Cover (防觸蓋)	—	—	—	—
Retaining Plates (中界板)	—	—	—	—
Tool (工具)	DS3	—	DS3	—

Features of Spring Clamp Terminal Blocks

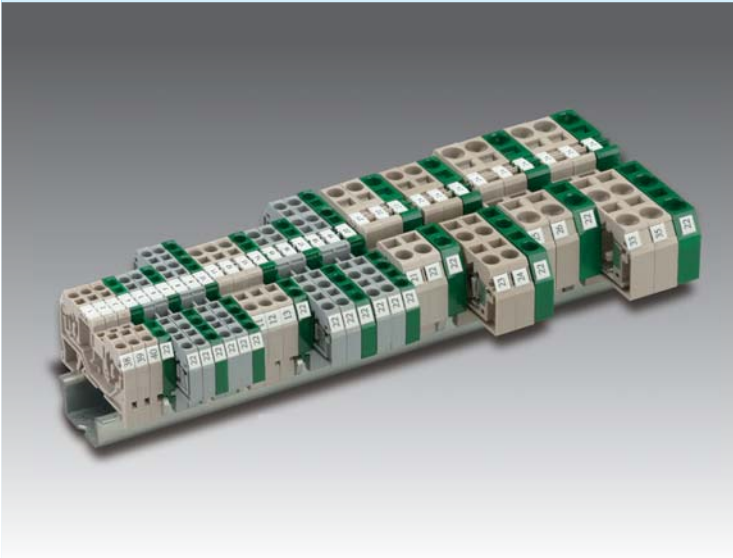

SDU 1.5



Features of Spring Clamp Terminal Blocks


- Space - saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.

彈片壓接型接線座之特性



- 節省空間之設計 / 前緣導線連接方式
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	1.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	600V/10A/AWG 16-28	
CSA	600V/10A/AWG 16-28	
IEC	800V/17.5A/0.2-1.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	4x52x34.5	
For TS35x15	4x52x42	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)	SEP15	50
Comb Link (邊接式聯接件)	SQV1.5/2	50
	SQV1.5/3	50
	SQV1.5/4	50
MarkingTags (標記號)	W3 W3Z W3K	500
Tool (工具)	DS2	


SDU 1.5/3



SDU 1.5/4



SDU 2.5





Specifications (產品規格)	1.5 mm ²	1.5 mm ²	2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	
UL	600V/10A/AWG 16-28	600V/10A/AWG 16-28	 600V/18A/AWG 12-28	
CSA	600V/10A/AWG 16-28	600V/10A/AWG 16-28	600V/18A/AWG 12-28	
IEC	800V/17.5A/0.2~1.5mm ²	800V/17.5A/0.2~1.5mm ²	 800V/24A/0.2~2.5mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3	8KV / 3	8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9mm	8-9mm	8-9 mm	
Material/Available Color (材質顏色)				
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)	
For TS35x7.5 	4x62.5x34.5	4x73x34.5	5 x 53 x 35.5	
For TS35x15 	4x62.5x42	4x73x42	5 x 53 x 43	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50
End Plate (擋板) 	SEP16	50	SEP17	50
Comb Link (連接式聯接件) 	SQV1.5/2	50	SQV1.5/2	50
	SQV1.5/3	50	SQV1.5/3	50
	SQV1.5/4	50	SQV1.5/4	50
MarkingTags (標記號) 	W3 W3Z W3K	500	W3 W3Z W3K	500
Tool (工具) 	DS2		DS2	
			DS3	

SDU 2.5/3


SDU 2.5/4

SDU 4





Specifications (產品規格)	2.5 mm ²	2.5 mm ²	4 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	c 600V/18A/AWG 12-28	c 600V/18A/AWG 12-28	c 600V/20A/AWG 12-28
CSA	600V/18A/AWG 12-28	600V/18A/AWG 12-28	600V/20A/AWG 12-28
IEC	800V/24A/0.2~2.5mm ²	800V/24A/0.2~2.5mm ²	800V/32A/0.2~4mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length(mm) (剝線長度)	8-9 mm	8-9mm	9-10mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	5 x 64 x 35.5	5 x 75 x 35.5	6 x 59 x 36.5
For TS35x15	5 x 64 x 43	5 x 75 x 43	6 x 59 x 44
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	SEP 2 50	SEP 3 50	SEP 4 50
Comb Link (連接式聯接件)	SQV 2.5/2 50	SQV 2.5/2 50	SQV 4/2 50
	SQV 2.5/3 50	SQV 2.5/3 50	SQV 4/3 50
MarkingTags (標記號)	W5 W5Z W5K 500	W5 W5Z W5K 500	W6 W6Z W6K 500
Tool (工具)	DS3	DS3	DS3


SDU 4/3



SDU 4/4



SDU 6






Specifications (產品規格)	4 mm ²		4 mm ²		6 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	c US 600V/20A/AWG 12-28		c US 600V/20A/AWG 12-28		c US 600V/30A/AWG 10-24	
CSA	600V/20A/AWG 12-28		600V/20A/AWG 12-28		600V/30A/AWG 10-24	
IEC	800V/32A/0.2~4mm ²		800V/32A/0.2~4mm ²		800V/41A/0.2~6mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9 mm		9-10 mm		12-13 mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	6 x 73.5 x 36.5		6 x 86 x 36.5		8 x 74.5 x 40	
For TS35x15	6 x 73.5 x 44		6 x 86 x 44		8 x 74.5 x 47.5	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板)	SEP 5	50	SEP 6	50	SEP 7	50
Comb Link (連接式聯接件)	SQV 4/2	50	SQV 4/2	50	SQV 6/2	50
	SQV 4/3	50	SQV 4/3	50	SQV 6/3	50
MarkingTags (標記號)	W6 W6Z W6K	500	W6 W6Z W6K	500	W6 W6Z W6K	500
Tool (工具)	DS3		DS3		DS4	

SDU 6/3


SDU 10

SDU 10/3




Specifications (產品規格)	6 mm ²	10 mm ²	10 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	600V/30A/AWG 10-24	600V/38A/AWG 8-24	600V/38A/AWG 8-24
CSA	600V/30A/AWG 10-24	600V/38A/AWG 8-24	600V/38A/AWG 8-24
IEC	800V/41A/0.2~6mm ²	800V/57A/0.2~10mm ²	800V/57A/0.2~10mm ²
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length(mm) (剝線長度)	12-13 mm	15-16 mm	15-16 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	8 x 93 x 40	10 x 78 x 42.5	10 x 97.5 x 42.5
For TS35x15	8 x 93 x 47.5	10 x 78 x 50	10 x 97.5 x 50
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	SEP 8 50	SEP 9 50	SEP 10 50
Comb Link (連接式聯接件)	SQV 6/2 50	SQV 10/2 50	SQV 10/2 50
	SQV 6/3 50	SQV 10/3 50	SQV 10/3 50
MarkingTags (標記號)	W6 W6Z W6K 500	W6 W6Z W6K 500	W6 W6Z W6K 500
Tool (工具)	DS4	DS5	DS5

Features of Spring Clamp Terminal Blocks

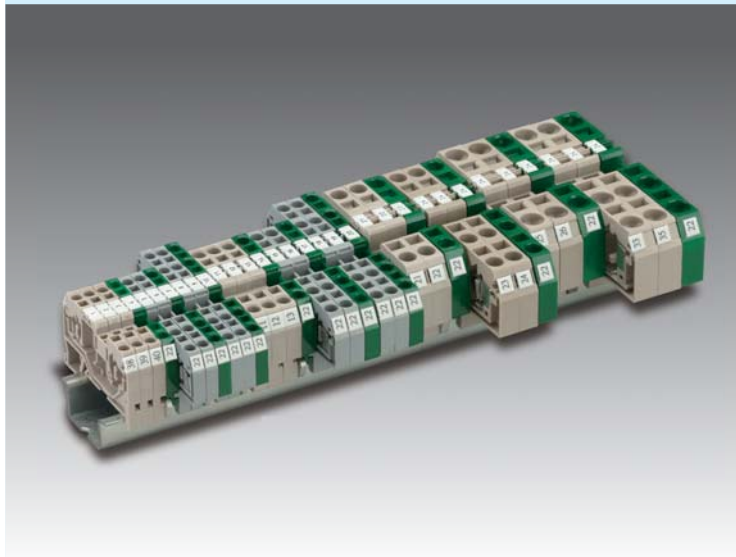

SDU 16



Features of Spring Clamp Terminal Blocks


- Space - saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.

彈片壓接型接線座之特性


- 節省空間之設計 / 前緣導線連接方式
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)		16 mm ²	
Technical Data (技術參數)		Rated voltage/Rated current/Wire size	
UL		cUL [®] 600V/65A/AWG 4-16	
CSA		600V/65A/AWG 4-16	
IEC		800V/85A/1.5-16 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)		8KV / 3	
Insulation stripping length(mm) (剝線長度)		16-17mm	
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)		T / W / H (mm)	
For TS35x7.5		12.2x82.5x51	
For TS35x15		12.2x82.5x58.5	
Accessories (附件)		Cat. No.	Qty.
End Bracket (終端擋板)		SEW35	50
End Plate (擋板)		SEP12	50
Comb Link (邊接式聯接件)		SQV16/2	50
Marking Tags (標記號)		W6 W6Z W6K	500
Tool (工具)		DS5	


SDU 16/3



SDU 35



SDK 2.5



Specifications (產品規格)	16 mm ²	35 mm ²	2.5 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	600V/65A/AWG 4-16	600V/120A/AWG 2-12	 600V/20A/AWG 12-28
CSA	600V/65A/AWG 4-16	600V/120A/AWG 2-12	600V/20A/AWG 12-28
IEC	800V/76A/1.5~16mm ²	800V/125A/2.5~35mm ²	800V/24A/0.2~2.5mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length(mm) (剝線長度)	16-17mm	25mm	8-9 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5 	12.2x107.8x51	16x100x59	5x75.5x44.5
For TS35x15 	12.2x107.8x58.5	16x100x66.5	5x75.5x52
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板) 	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板) 	SEP13 50	SEP14 50	SEP 11 50
Comb Link (連接式聯接件) 	SQV16/2 50	SQV35/2 50	SQV 2.5/2 50 SQV 2.5/3 50
MarkingTags (標記號) 	W6 W6Z W6K 500	W6 W6Z W6K 500	W5 W5Z W5K 500
Tool (工具) 	DS5	DS6	DS3

Features of spring Clamp Terminal Blocks



SDUB 1.5






Features of Spring Clamp Terminal Blocks



- Space - saving design
- Top entry & side entry are available at customer's option.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.

彈片壓接型接線座之特性

- 節省空間之設計
- 上方導線及側向導線二種連接方式可供選擇
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)		1.5 mm ²
Technical Data (技術參數)		Rated voltage/Rated current/Wire size
UL		300V/10A/AWG28-16
CSA		300V/10A/AWG28-16
IEC		400V/17.5A/0.2-1.5 mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)		6KV / 3
Insulation stripping length(mm) (剝線長度)		8-10mm
Material/Available Color (材質顏色)		
Dimensions (外形尺寸)		T / W / H (mm)
		5x25x17
Accessories (附件)		Cat. No. Qty.
 Central Terminals (中間端子)		SDUB 1.5-A 25
		SDUB 1.5/2-B 25
		SDUB 1.5/2-A 25
		SDUB 1.5/2-B 25
End Bracket (擋板)		SDUB 1.5/2-C 25
Comb Link (連接式聯接件)		SQB 1.5 25
Lever (壓板)		SDUB 1.5-D 25
Tool (工具)		DS 2.5 10


SDUB 1.5/2




SDUB 2.5




SDUB 2.5/2



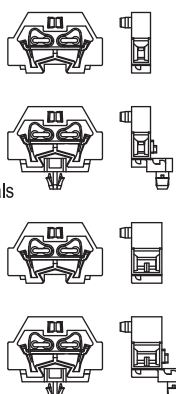Specifications (產品規格)	1.5 mm ²	2.5 mm ²	2.5 mm ²			
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size			
UL	300V/10A/AWG28-16	 300V/15A/AWG28-14	300V/15A/AWG28-14			
CSA	300V/10A/AWG28-16	300V/15A/AWG28-14	300V/15A/AWG28-14			
IEC	400V/17.5A/0.2-1.5 mm ²	 500V/24A/0.2-2.5 mm ²	500V/24A/0.2-2.5 mm ²			
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	6KV / 3	6KV / 3			
Insulation stripping length(mm) (剝線長度)	8-10mm	8-10mm	8-10mm			
Material/Available Color (材質顏色)						
Dimensions (外形尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)			
	8x25x17	6x28x18	10x28x18			
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
 Central Terminals (中間端子)	SDUB 1.5-A	25	SDUB 2.5-A	25	SDUB 2.5-A	25
	SDUB 1.5-B	25	SDUB 2.5-B	25	SDUB 2.5-B	25
	SDUB 1.5/2-A	25	SDUB 2.5/2-A	25	SDUB 2.5/2-A	25
	SDUB 1.5/2-B	25	SDUB 2.5/2-B	25	SDUB 2.5/2-B	25
 End Bracket (擋板)	SDUB 1.5-C	25	SDUB 2.5-C	25	SDUB 2.5-C	25
 Comb Link (連接式聯接件)	SQB 1.5	25	SQB 2.5	25	SQB 2.5	25
 Lever (壓板)	SDUB 1.5-D	25	SDUB 2.5-D	25	SDUB 2.5-D	25
 Tool (工具)	DS 2.5	10	DS 3	10	DS 3	10

SDUB 4

SDUB 4/2



Specifications (產品規格)	4 mm ²		4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	cUL [®] 300V/20A/AWG28-12		cUL [®] 300V/20A/AWG28-12	
CSA	300V/20A/AWG28-12		300V/20A/AWG28-12	
IEC	630V/24A/0.2-4mm ²		630V/24A/0.2-4mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	6KV / 3		6KV / 3	
Insulation stripping length(mm) (剝線長度)	9-10mm		9-10mm	
Material/Available Color (材質顏色)				
Dimensions (外形尺寸)	T / W / H (mm)		T / W / H (mm)	
	7x33.4x23		12x33.4x23	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
 Central Terminals (中間端子)	SDUB 4-A	25	SDUB 4-A	25
	SDUB 4-B	25	SDUB 4-B	25
	SDUB 4/2-A	25	SDUB 4/2-A	25
	SDUB 4/2-B	25	SDUB 4/2-B	25
 End Bracket (擋板)	SDUB 4-C	25	SDUB 4-C	25
 Comb Link (連接式聯接件)	SQB 4	25	SQB 4	25
 Lever (壓板)	SDUB 4-D	25	SDUB 4-D	25
 Tool (工具)	DS 3	10	DS 3	10

Features of Spring Clamp Terminal Blocks



SDUNP 2.5



Features of Spring Clamp Terminal Blocks


- Space - saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.

彈片壓接型接線座之特性

- 節省空間之設計 / 前緣導線連接方式
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	c  US 600V/15A/AWG 12-28	
CSA	600V/15A/AWG 12-28	
IEC	800V/24A/0.2-2.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Insulation stripping length(mm) (剝線長度)	10-12mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5 	-	
For TS35x15 	-	
For TS15x5.5 	6x32.2x30	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW15	50
End Plate (擋板) 	SDUNB2.5-C	50
Comb Link (連接式聯接件) 	SQV1.5/2	50
	SQV1.5/3	50
	SQV1.5/4	50
MarkingTags (標記號) 	W6 W6Z W6K	500
Tool (工具) 	DS3	


SDUNP 2.5/2



SDUNT 2.5




SDUNT 2.5/2



Specifications (產品規格)	2.5 mm ²		2.5 mm ²		2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	600V/15A/AWG 12-28		cUL [®] 600V/15A/AWG 12-28		600V/15A/AWG 12-28	
CSA	600V/15A/AWG 12-28		600V/15A/AWG 12-28		600V/15A/AWG 12-28	
IEC	800V/24A/0.2-2.5 mm ²		800V/24A/0.2-2.5 mm ²		800V/24A/0.2-2.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length(mm) (剝線長度)	10-12mm		10-12mm		10-12mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5			6x37x32		10x37x32	
For TS35x15			6x37x39.5		10x37x39.5	
For TS15x5.5	10x32.2x30					
Accessories (附件)	Cat. No. Qty.		Cat. No. Qty.		Cat. No. Qty.	
End Bracket (終端擋板)	SEW15	50	SEW35	50	SEW35	50
End Plate (擋板)	SDUNB2.5-C	50	SDUNB2.5-C	50	SDUNB2.5-C	50
Comb Link (連接式聯接件)						
Marking Tags (標記號)	W5 W5Z W5K	500	W6 W6Z W6K	500	W5 W5Z W5K	500
Tool (工具)	DS3		DS3		DS3	

Features of spring Clamp Terminal Blocks

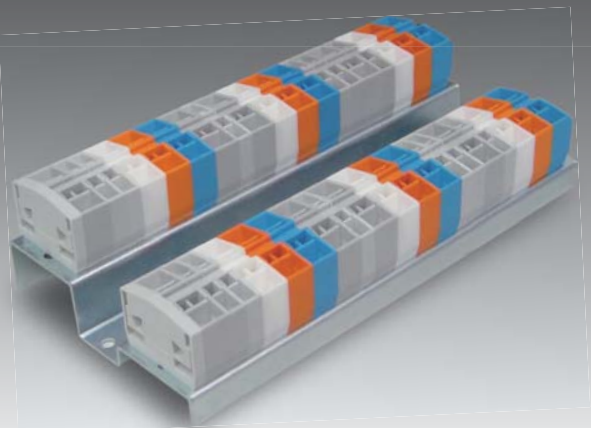

SDUNB 2.5



Features of Spring Clamp Terminal Blocks


- Space - saving design
- Top entry & side entry are available at customer's option.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.

彈片壓接型接線座之特性

- 節省空間之設計
- 上方導線及側向導線二種連接方式可供選擇
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	C  US 600V/15A/AWG28-12	
CSA	600V/15A/AWG28-12	
IEC	800V/24A/0.2-2.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Insulation stripping length(mm) (剝線長度)	10-12mm	
Material/Available Color (材質顏色)		
Dimensions (外形尺寸)	T / W / H (mm)	
	6x22.2x32.2	
Accessories (附件)	Cat. No.	Qty.
(中間端子) 	SDUNB2.5-B	25
	SDUNS2.5-B	25
	SDUNS2.5/2-A	25
	SDUNB2.5/2-B	25
End Bracket (終端擋板) 	SDUNB2.5-C	25
Comb Link (連接式聯接件) 		
Marking Tags (標記號) 	W6 W6Z W6K	500
End Plate (擋板) 		
Tool (工具) 	DS3	25


SDUNB 2.5/2



SDUNS 2.5




SDUNS 2.5/2



Specifications (產品規格)	2.5 mm ²		2.5 mm ²		2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	600V/15A/AWG28-12		cUL [®] 600V/15A/AWG28-12		600V/15A/AWG28-12	
CSA	600V/15A/AWG28-12		600V/15A/AWG28-12		600V/15A/AWG28-12	
IEC	800V/24A/0.2-2.5 mm ²		800V/24A/0.2-2.5 mm ²		800V/24A/0.2-2.5 mm ²	
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length(mm) (剝線長度)	10-12mm		10-12mm		10-12mm	
Material/Available Color (材質顏色)						
Dimensions (外形尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
	10x22.2x32.2		6x22.2x32.2		10x22.2x32.2	
Accessories (附件)	Cat. No. Qty.		Cat. No. Qty.		Cat. No. Qty.	
Terminal Strip (中間端子)	SDUNS2.5-B	25	SDUNS2.5-A	25	SDUNS2.5-A	25
	SDUNB2.5-B	25	SDUNS2.5-B	25	SDUNS2.5-B	25
	SDUNB2.5/2-B	25	SDUNS2.5/2-B	25	SDUNS2.5/2-B	25
	SDUNS2.5/2-A	25				
End Bracket (終端擋板)	SDUNB2.5-C	25	SDUNS2.5-C	25	SDUNS2.5-C	25
Comb Link (連接式聯接件)						
Marking Tags (標記號)	W5 W5Z W5K	500	W6 W6Z W6K	500	W5 W5Z W5K	500
End Plate (擋板)						
Tool (工具)	DS3		DS3		DS3	

Features of spring Clamp Terminal Blocks

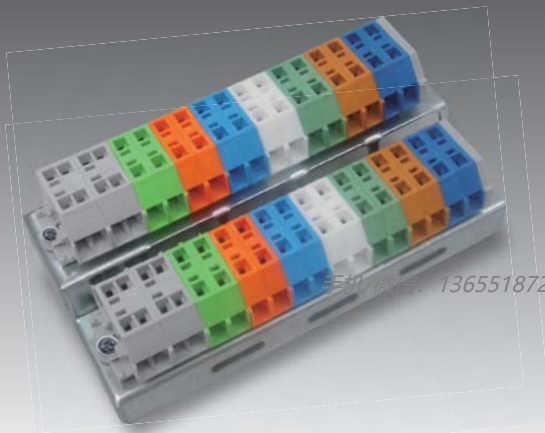

手机/微信: 13655187271 <http://www.decachina.com/>

SDUS 1.5



Features of Spring Clamp Terminal Blocks


- Space - saving design
- Top entry & side entry are available at customer's option.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion - proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.

彈片壓接型接線座之特性


- 節省空間之設計
- 上方導線及側向導線二種連接方式可供選擇
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高

Specifications (產品規格)	11.6	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	UL 300V/10A/AWG28-16	
CSA	300V/10A/AWG28-16	
IEC	IEC 400V/17.5A/0.2-1.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	
Insulation stripping length(mm) (剝線長度)	8-10mm	
Material/Available Color (材質顏色)		
Dimensions (外形尺寸)	T / W / H (mm)	
	5x25x17	
Accessories (附件)	Cat. No.	Qty.
 Central Terminals (中間端子)	SDUB 1.5-B	25
	SDUB 1.5/2-B	25
 End Bracket (擋板)	SDUB 1.5-C	25
 Comb Link (連接式聯接件)	SQB 1.5	25
 Lever (壓板)	SDUB 1.5-D	25
 Tool (工具)	DS 2.5	10


SDUS 1.5/2




SDUS 2.5




SDUS 2.5/2



Specifications (產品規格)	1.5 mm ²	2.5 mm ²	2.5 mm ²			
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size			
UL	300V/10A/AWG28-16	 300V/15A/AWG28-14	300V/15A/AWG28-14			
CSA	300V/10A/AWG28-16	300V/15A/AWG28-14	300V/15A/AWG28-14			
IEC	400V/17.5A/0.2-1.5 mm ²	 500V/24A/0.2-2.5 mm ²	500V/24A/0.2-2.5 mm ²			
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3	8KV / 3	8KV / 3			
Insulation stripping length(mm) (剝線長度)	8-10mm	8-10mm	8-10mm			
Material/Available Color (材質顏色)						
Dimensions (外形尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)			
	8x25x17	6x28x18	10x28x18			
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
 Central Terminals (中間端子)	SDUB 1.5-B	25	SDUB 2.5-B	25	SDUB 2.5-B	25
	SDUB 1.5/2-B	25	SDUB 2.5/2-B	25	SDUB 2.5/2-B	25
End Bracket (擋板) 	SDUB 1.5-C	25	SDUB 2.5-C	25	SDUB 2.5-C	25
Comb Link (邊接式聯接件) 	SQB 1.5	25	SQB 2.5	25	SQB 2.5	25
Lever (壓板) 	SDUB 1.5-D	25	SDUB 2.5-D	25	SDUB 2.5-D	25
Tool (工具) 	DS 2.5	10	DS 3	10	DS 3	10


SDUS 4

SDUS 4/2



Specifications (產品規格)	4 mm ²		4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	c  US 300V/20A/AWG28-12		c  US 300V/20A/AWG28-12	
CSA	300V/20A/AWG28-12		300V/20A/AWG28-12	
IEC	630V/24A/0.2-4mm ²		630V/24A/0.2-4mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3		8KV / 3	
Insulation stripping length(mm) (剝線長度)	9-10mm		9-10mm	
Material/Available Color (材質顏色)				
Dimensions (外形尺寸)	T / W / H (mm)		T / W / H (mm)	
	7x33.4x23		12x33.4x23	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
 Central Terminals (中間端子)	SDUB 4-B	25	SDUB 4-B	25
	SDUB 4/2-B	25	SDUB 4/2-B	25
 End Bracket (擋板)	SDUB 4-C	25	SDUB 4-C	25
 Comb Link (邊接式聯接件)	SQB 4	25	SQB 4	25
 Lever (壓板)	SDUB 4-D	25	SDUB 4-D	25
 Tool (工具)	DS 3	10	DS 3	10

Features of Spring Clamp Ground Terminal Blocks

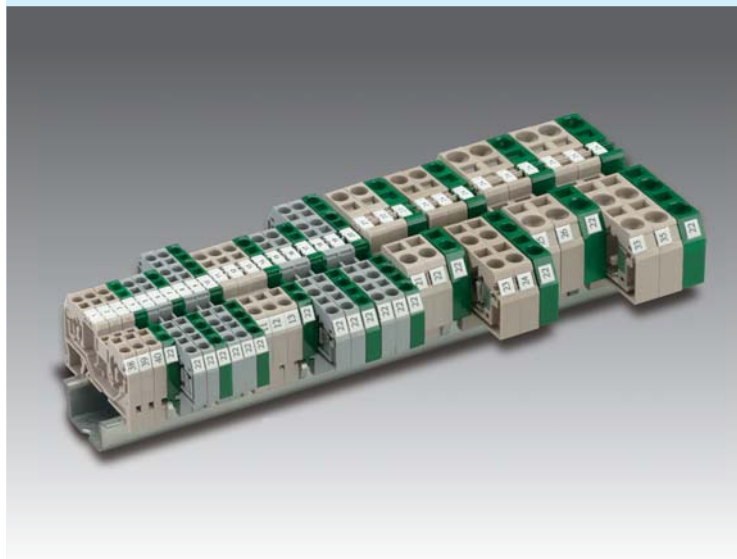

SPE 1.5



Features of Spring Clamp Ground Terminal Blocks


- Vibration proof grounding
- Space-saving design / Front connection.
- Easy to operate, fast wiring installation with top wire entry.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- Low contact resistance.
- Easy mounting and dismounting from the terminal rail.

彈片接地型接線座之特性


- 具有抗震及接地之效果
- 節省空間之設計 / 前緣導線連接方式
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 容易擴充及延伸性佳
- 操作簡便且連結處安全性高
- 低接觸電阻
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)		1.5 mm ²	
Technical Data (技術參數)		Rated voltage/Rated current/Wire size	
UL		AWG16-28	
CSA		AWG16-28	
IEC		0.2-1.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)		8KV / 3	
Insulation stripping length(mm) (剝線長度)		8-9mm	
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)		T / W / H (mm)	
For TS35x7.5		4x52x34.5	
For TS35x15		4x52x42	
Accessories (附件)		Cat. No.	Qty.
End Bracket (終端擋板)		SEW35	50
End Plate (擋板)		SEP15	50
Comb Link (邊接式聯接件)		SQV1.5/2	50
		SQV1.5/3	50
		SQV1.5/4	50
Marking Tags (標記號)		W3 W3Z W3K	500
Tool (工具)		DS2	


SPE 1.5/3



SPE 1.5/4



SPE 2.5



Specifications (產品規格)	1.5 mm ²	1.5 mm ²	2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	
UL	AWG 16-28	AWG 16-28	 AWG 12-28	
CSA	AWG 16-28	AWG 16-28	AWG 12-28	
IEC	0.2~1.5mm ²	0.2~1.5mm ²	800V/24A/0.2~2.5mm ²	
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	8KV / 3	8KV / 3	8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9mm	8-9mm	8-9mm	
Material/Available Color (材質顏色)				
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)	
For TS35x7.5 	4x62.5x34.5	4x73x34.5	5 x 53 x 35.5	
For TS35x15 	4x62.5x42	4x73x42	5 x 53 x 43	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50
End Plate (擋板) 	SEP16	50	SEP17	50
Comb Link (連接式聯接件) 	SQV1.5/2	50	SQV1.5/2	50
	SQV1.5/3	50	SQV1.5/3	50
	SQV1.5/4	50	SQV1.5/4	50
MarkingTags (標記號) 	W3 W3Z W3K	500	W3 W3Z W3K	500
Tool (工具) 	DS2		DS2	




SPE 2.5/3



SPE 2.5/4



SPE 4



Specifications (產品規格)	2.5 mm ²		2.5 mm ²		4 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	c  US AWG 12-28		c  US AWG 12-28		c  US AWG 12-28	
CSA	AWG 12-28		AWG 12-28		AWG 12-28	
IEC	0.2-2.5mm ²		0.2-2.5mm ²		0.2-4mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9 mm		8-9mm		9-10mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5 	5 x 64 x 35.5		5 x 75 x 35.5		6 x 59 x 36.5	
For TS35x15 	5 x 64 x 43		5 x 75 x 43		6 x 59 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	SEP 2	50	SEP 3	50	SEP 4	50
Comb Link (連接式聯接件) 	SQV 2.5/2	50	SQV 2.5/2	50	SQV 4/2	50
	SQV 2.5/3	50	SQV 2.5/3	50	SQV 4/3	50
MarkingTags (標記號) 	W5 W5Z W5K	500	W5 W5Z W5K	500	W6 W6Z W6K	500
Tool (工具) 	DS3		DS3		DS3	




SPE 4/3



SPE 4/4



SPE 6



Specifications (產品規格)	4 mm ²	4 mm ²	6 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	
UL	 US AWG 12-28	 US AWG 12-28	 US AWG 10-24	
CSA	AWG 12-28	AWG 12-28	AWG 10-24	
IEC	0.2~4mm ²	0.2~4mm ²	0.2~6mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3	8KV / 3	8KV / 3	
Insulation stripping length(mm) (剝線長度)	8-9 mm	9-10 mm	12-13 mm	
Material/Available Color (材質顏色)				
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)	
For TS35x7.5 	6 x 73.5 x 36.5	6 x 86 x 36.5	8 x 74.5 x 40	
For TS35x15 	6 x 73.5 x 44	6 x 86 x 44	8 x 74.5 x 47.5	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50
End Plate (擋板) 	SEP 5	50	SEP 6	50
Comb Link (邊接式聯接件) 	SQV 4/2	50	SQV 4/2	50
	SQV 4/3	50	SQV 4/3	50
MarkingTags (標記號) 	W6 W6Z W6K	500	W6 W6Z W6K	500
Tool (工具) 	DS3		DS3	
			DS4	




SPE 6/3



SPE 10




SPE 10/3




Specifications（產品規格）	6 mm ²	10 mm ²	10 mm ²			
Technical Data（技術參數）	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size			
UL	 AWG 10-24	 AWG 8-24	 AWG 8-24			
CSA	AWG 10-24	AWG 8-24	AWG 8-24			
IEC	0.2~6mm ²	0.2~10mm ²	0.2~10mm ²			
Insulating impulse voltage withstand / Pollution degree（額定衝擊電壓 / 污染等級）	8KV / 3	8KV / 3	8KV / 3			
Insulation stripping length(mm)（剝線長度）	12-13 mm	15-16 mm	15-16 mm			
Material/Available Color（材質顏色）						
Rail Dimensions（導軌尺寸）	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)			
For TS35x7.5 	8 x 93 x 40	10 x 78 x 42.5	10 x 97.5 x 42.5			
For TS35x15 	8 x 93 x 47.5	10 x 78 x 50	10 x 97.5 x 50			
Accessories（附件）	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket（終端擋板） 	SEW35	50	SEW35	50	SEW35	50
End Plate（擋板） 	SEP 8	50	SEP 9	50	SEP 10	50
Comb Link（邊接式聯接件） 	SQV 6/2	50	SQV 10/2	50	SQV 10/2	50
	SQV 6/3	50	SQV 10/3	50	SQV 10/3	50
MarkingTags（標記號） 	W6 W6Z W6K	500	W6 W6Z W6K	500	W6 W6Z W6K	500
Tool（工具） 	DS4		DS5		DS5	



SPE 16



SPE 16/3



SPE 35



Specifications（產品規格）	16 mm ²	16 mm ²	35 mm ²	
Technical Data（技術參數）	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	
UL	 AWG4-16	AWG4-16	AWG2-12	
CSA	AWG4-16	AWG4-16	AWG2-12	
IEC	1.5~16mm ²	1.5~16mm ²	2.5~35mm ²	
Insulating impulse voltage withstand /Pollution degree（額定衝擊電壓 /污染等級）	8KV / 3	8KV / 3	8KV / 3	
Insulation stripping length(mm)（剝線長度）	16-17 mm	16-17 mm	25 mm	
Material/Available Color（材質顏色）				
Rail Dimensions（導軌尺寸）	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)	
For TS35x7.5 	12.2x82.5x51	12.2x107.8x51	16x100x59	
For TS35x15 	12.2x82.5x58.5	12.2x107.8x58.5	16x100x66.5	
Accessories（附件）	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket（終端擋板） 	SEW 35	50	SEW 35	50
End Plate（擋板） 	SEP 12	50	SEP 12	50
Comb Link（連接式聯接件） 	SQV 16/2	50	SQV 16/2	50
MarkingTags（標記號） 	W6	500	W6	500
Tool（工具） 	DS5		DS5	
			DS6	

Accessories


End Bracket

to provide a secure mechanical stop on the rail.

					
Type	CEW15	CEW35/1	CEW35/2	CEW35/3	SEW35
Size	8×28×30.7	12×56×63	8×56×47	8.5×31×46	6×56×42
Terminal Model	CDU 2.5M CDU 4M	CDU 16 CDU 35 CDU 50 CDU 95 CPE16 CPE35 CPE50 CPE95	CDU 2.5 CPE 2.5 CDU 4 CPE 4 CDU 6 CPE 6 CDU 10 CPE 10 CDU 2.5N CPE 16 CDU 4N CPE 35 CDU 6N CPE 50 CDU 10N CPE 95 CDK 2.5 CTR 2.5 CDK 4 CTR 2.5D CDK 6 CTR 4 CDK 10 CTR 4D CTR 4SI CTR 6 CTR 6D CTR 6SI CTR 10 CTR 10D CTR 10SI CTR 4SI/EN	CDU 2.5 CPE 2.5 CDU 4 CPE 4 CDU 6 CPE 6 CDU 10 CPE 10 CDU 2.5N CPE 16 CDU 4N CPE 35 CDU 6N CPE 50 CDU 10N CPE 95 CDK 2.5 CTR 2.5 CDK 4 CTR 2.5D CDK 6 CTR 4 CDK 10 CTR 4D CTR 4SI CTR 6 CTR 6D CTR 6SI CTR 10 CTR 10D CTR 10SI CTR 4SI/EN	SPE 2.5 SDU 2.5 SPE 2.5/3 SDU 2.5/3 SPE 2.5/4 SDU 2.5/4 SPE 4 SDU 4 SPE 4/3 SDU 4/3 SPE 4/4 SDU 4/4 SPE 6 SDU 6 SPE 6/3 SDU 6/3 SPE 10 SDU 10 SPE 10/3 SDU 10/3

Terminal Rails

A range of terminal rail for component installation together with end brackets for holding and isolating the components.

				
Type	TS-15	TS-21	TS-37	TS-31
Size	15 x 5.5 mm H	32 x 15 mm H	35 x 7.5 mm H	35 x 15 mm H
Terminal Model	CDU 2.5M CDU 4M	CDU 2.5 CPE 2.5 CDU 4 CPE 4 CDU 6 CPE 6 CDU 10 CPE 10 CDU 16 CPE 16 CDU 35 CPE 35 CDU 50 CPE 50 CDU 95 CPE 95 CDU 2.5SL CPE 2.5N CDU 4SL CPE 4N CDU 6SL CPE 6N CDU 10SL CPE 10N	CDK 2.5 CTR 2.5 CDK 4 CTR 2.5D CDK 6 CTR 4 CDK 10 CTR 4D CTR 4SI CTR 6 CTR 6D CTR 6SI CTR 10 CTR 10D CTR 10SI CTL 6 CTL 6-1	SDU 2.5 SPE 2.5 SDU 2.5/3 SPE 2.5/3 SDU 2.5/4 SPE 2.5/4 SDU 4 SPE 4 SDU 4/3 SPE 4/3 SDU 4/4 SPE 4/4 SDU 6 SPE 6 SDU 6/3 SPE 6/3 SDU 10 SPE 10 SDU 10/3 SPE 10/3 SDU 16 SPE 16


End Plate		Partition				
		to enclose terminal assemblies.		to provide a visual separation between the groups of terminal blocks.		
						
Type	CEP1		CEP2	CEP3	CEP4	CEP5
End Plate Terminal Model	CDU 2.5 CDU 2.5SL CDU 4 CDU 4SL CDU 6 CDU 6SL CDU 10 CDU 10SL CTR 2.5 CTR 2.5D CTR 4 CTR 4D CTR 4SI		CDU 16 CDU 35	CDK 2.5 CDK 4	CDK 6 CDK 10	CTR 6 CTR 6D CTR 6SI CTR 10 CTR 10D CTR 10SI
Partition Terminal Model			CTR 2.5D CTR 4D CTR 4SI CTR 6D CTR 6SI CTR 10D CTR 10SI			CDU 2.5 CDU 4 CDU 6 CDU 10 CTR 2.5 CTR 4
						
Type	CEP6		CEP7	CEP8	CEP9	
End Plate Terminal Model	CDU 2.5N CDU 4N CDU 6N CDU 10N		CDU 2.5M CDU 4M	CTL 6 CTL 6-1	CTL 6 CTL 6-1	
Partition Terminal Model						

End Plate											
											
Type	SEP 1	SEP 2	SEP 3	SEP 4	SEP 5	SEP 6	SEP 7	SEP 8	SEP 9	SEP 10	SEP 11
Terminal Model	SDU 2.5 SPE 2.5	SDU 2.5/3 SPE 2.5/3	SDU 2.5/4 SPE 2.5/4	SDU 4 SPE 4	SDU 4/3 SPE 4/3	SDU 4/4 SPE 4/4	SDU 6 SPE 6	SDU 6/3 SPE 6/3	SDU 10 SPE 10	SDU 10/3 SPE 10/3	SDK 2.5
	SEP 12										
	SDU 16 SPE 16										

Features of Spring Clamp Ground Terminal Blocks


- Function of preventing electric shock
- Easy installation & disassembly
- Space saving design
- Robust housing for using PC material

- 防觸電之功能
- 安裝及拆卸容易
- 節省空間之設計
- 材質不易破損

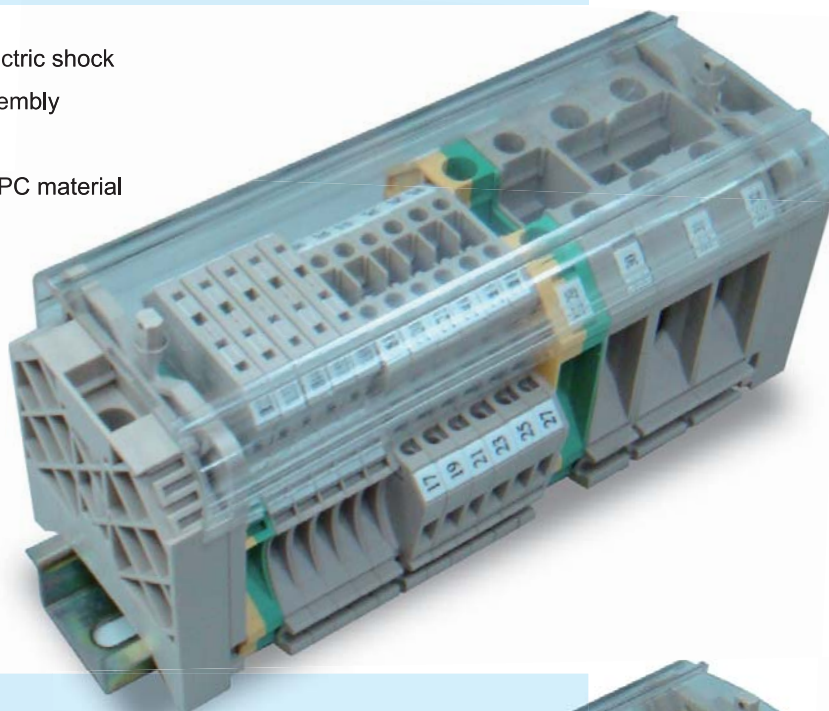


Protection Cover

to provide protection against unintentional operation of terminal points or disconnect terminal blocks.



DP 1

CDU 2.5	CPE 2.5	CTR 2.5
CDU 4	CPE 4	CTR 2.5D
CDU 6	CPE 6	CTR 4
CDU 10	CPE 10	CTR 4D
CDU 16	CPE 16	CTR 6
CDU 35	CPE 35	CTR 6D
CDK 2.5		CTR 10
CDK 4		CTR 10D

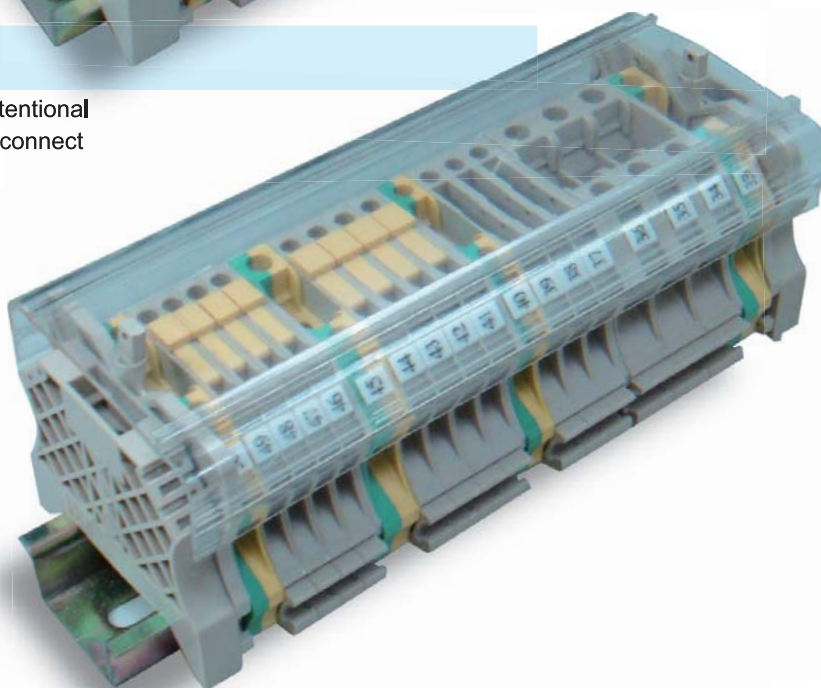

Retaining Plate



AD 1



AD 2

Type	AD 1			AD 2		
Size	3 x 56.5 x 58			3.5 x 56.5 x 74		
Terminal Model	CDU 2.5 CDU 4 CDU 6 CDU 10 CDU 16 CDU 35 CDU 2.5SL CDU 4SL CDU 6SL CDU 10SL	CPE 2.5 CPE 4 CPE 6 CPE 10 CPE 16 CPE 35	CTR 2.5 CTR 4 CTR 6 CTR 10 CTR 2.5D CTR 4D CTR 6D CTR 10D	CDU 16 CDU 35 CPE 16 CPE 35	CTR 2.5D CTR 4D CTR 6D CTR 10D	CDK 2.5 CDK 4

Accessories

Warning Cover



Type	WS-2.5	WS-4	WS-6	WS-10	WS-16	WS-35	WSS-2.5	WSS-4	WSS-6	WSS-10
Terminal Model	CDU 2.5 CDU 2.5SL	CDU 4 CDU 4SL	CDU 6 CDU 6SL	CDU 10 CDU 10SL	CDU 16	CDU 35	CDK 2.5	CDK 4	CDK 6	CDK 10

Diode Plug



Type	CSD 2.5	CSD 4	CSD 6	CSD 10	CSB 4
Electric Rating	+ —	2A 600V	2A 600V	3A 600V	3A 600V
	— +	2A 600V	2A 600V	3A 600V	3A 600V
Model	CTR 2.5 CTR 2.5D	CTR 4 CTR 4D CTR 4SI	CTR 6 CTR 6D CTR 6SI	CTR 10 CTR 10D CTR 10SI	CTR 4

LED Fuse Type Insert



Type	CSI 4	CSI 6	CSI 10
Rated Voltage	24V/48V/120V/240V/400V	24V/48V/120V/240V/400V	24V/48V/120V/240V/400V
Rated Current	0.1A~10A	0.1A~20A	0.1A~30A
Model	CTR 4 CTR 4D CTR 4SI	CTR 6 CTR 6D CTR 6SI	CTR 10 CTR 10D CTR 10SI

Accessories

Cross Jumper

are used for quick permanent cross connections of terminal blocks . The Cross Jumper has insulated captive screw , which makes them shock proof.




Type	CQV-2.5	CQV-4	CQV-6	CQV-10	CQV-16	CQV-35	CQV-50	CQV-95
Poles	2,3,4,10	2,3,4,10	2,3,4,10	2,3,4,10	2,3,4	2,3,4	2,3	
Terminal Model	CDU 2.5 CDU 2.5SL CDK 2.5	CDU 4 CDU 4SL CDK 4	CDU 6 CDU 6SL CDK 6	CDU 10 CDU 10SL CDK 10	CDU 16	CDU 35	CDU 50	CDU 95

Comb Link

are used for external cross connecting terminal blocks.
The links are insulated for shock proof .



Type	CQB-2.5	CQB-4	CQB-6	CQB-10	CQB-16	CQB-35	CQB-50	CQB-95	SQB 1.5	SQB 2.5	SQB 4
Poles	2,3,10	2,3,4,10	2,3,10	2,3,10	2,3,10	2,3,10	2,3	2,3	2	2	2
Terminal Model	CDU 2.5 CPE 2.5 CDK 2.5 CTR 2.5 CTR 2.5D CDU 2.5SL	CDU 4 CPE 4 CDK 4 CTR 4 CTR 4D CDU 4SL	CDU 6 CPE 6 CDK 6 CTR 6 CTR 6D CDU 6SL	CDU 10 CPE 10 CDK 10 CTR 10 CTR 10D CDU 10SL	CDU 16 CPE 16	CDU 35 CPE 35	CDU 50 CPE 50	CDU 95 CPE 95	SDUB 1.5 SDUS 1.5 SDUS 1.5/2	CDUS 2.5 SDUB 2.5 SDUB 2.5/2 SDUS 2.5 SDUS 2.5/2 SDUNP 2.5 SDUNP 2.5/2 SDUNT 2.5/2 SDUNT 2.5/2	SDUB 4 SDUB 4/2 SDUS 4 SDUS 4/2



Type	SQV-2.5		SQV-4		SQV-6		SQV-10	
Poles	2,3		2,3		2,3		2,3	
Terminal Model	SDU 2.5 SDU 2.5/3 SDU 2.5/4 SDK 2.5	SPE 2.5 SPE 2.5/3 SPE 2.5/4	SDU 4 SDU 4/3 SDU 4/4	SPE 4 SPE 4/3 SPE 4/4	SDU 6 SDU 6/3	SPE 6 SPE 6/3	SDU 10 SDU 10/3	SPE 10 SPE 10/3

Test Plug

Testing and make troubleshooting by connecting terminal blocks.



Type	TPS 2.0	TPS 2.3	TPS 4
Diameter(mm)	Ø2.0	Ø2.3	Ø4
Terminal Model	CDU 2.5	CDU 2.5 CDU 4 CDU 6 CDU 10	CDU 6 CDU 10 CDU 16 CDU 35

Socket



Type	TP 2.0	TP 2.3	TP 4
Terminal Model	CDU 2.5	CDU 2.5 CDU 4 CDU 6 CDU 10	CDU 6 CDU 10 CDU 16 CDU 35

Tool-Screw driver





Type	DS 3	DS 4	DS 5	DS 6	DE 6	DE 8	DK 5	DK 6	DK 8
Terminal Model	CDU 2.5 CDU 4 CPE 2.5 CPE 4 CDK 2.5 CDK 4 CTR 2.5 CTR 2.5D CTR 4 CTR 4D CTR 4SI SDU 2.5 SDU 2.5/3 SDU 2.5/4 SDU 4 SDU 4/3 SDU 4/4 SPE 2.5 SPE 2.5/3 SPE 2.5/4 SPE 4 SPE 4/3 SPE 4/4	CDU 6 CDU 10 CPE 6 CPE 10 CDK 6 CDK 10 CTR 6 CTR 6D CTR 6SI CTR 10 CTR 10D CTR 10SI SDU 6 SDU 6/3 SDU 10 SDU 10/3 SPE 6 SPE 6/3 CTL 6 CTL 6-1	CDU 16 CPE 16 CPE 50 SDU 10 SDU 10/3 SPE 10 SPE 10/3	CDU 35 CPE 35 CPE 95	CPE 50	CPE 95	CDU 50	CDU 95	CDU 150

Marking Tags



- Easy installation & disassembly
- Providing printing of various kinds of font
- Firm printing (not easily falling off)
- Blank marking tags for marking by customer
- Various kinds of specification upon request

- 安裝及拆卸容易
- 提供各種字形之印製
- 印刷字體不易脫落
- 空白片可供客戶自行書寫
- 多種不同尺寸規格提供選擇

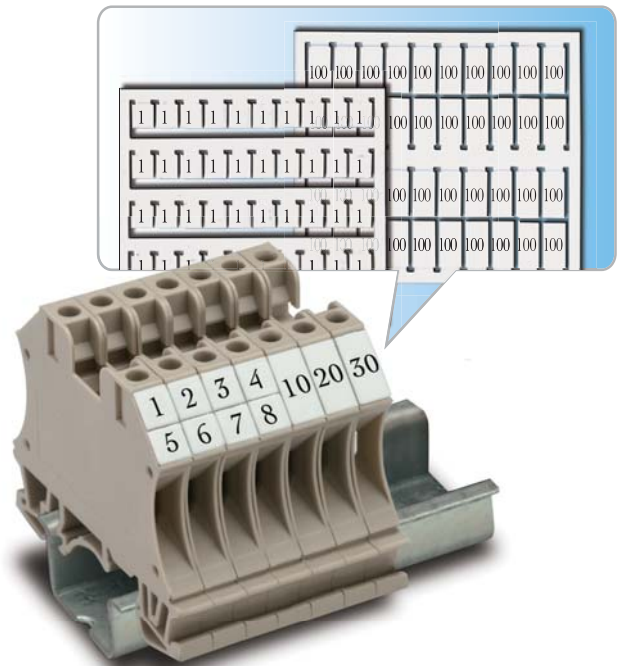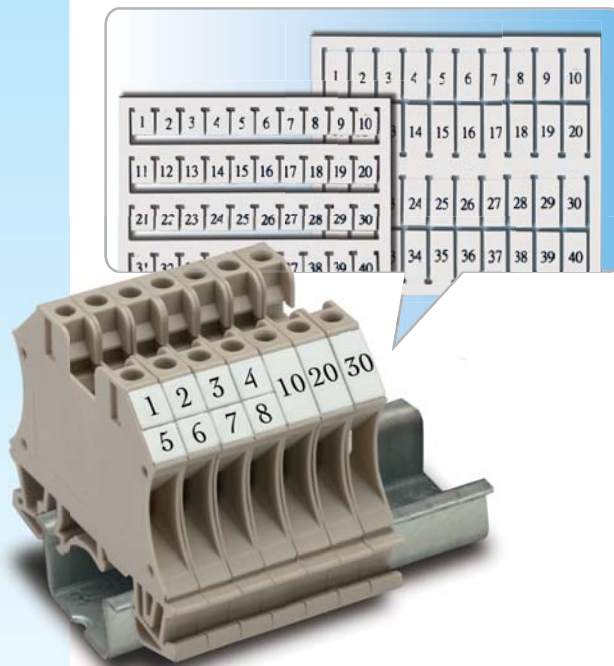


Marking Tags to provide logical and clear identification of the modular terminal blocks.

W

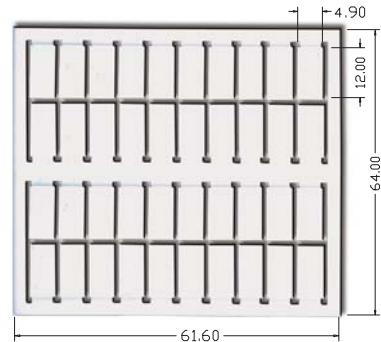


Marking Tags


WZ




~ TO ~




WZ




~ TO ~




WZ

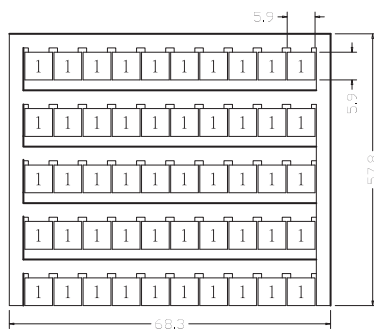


~ TO ~

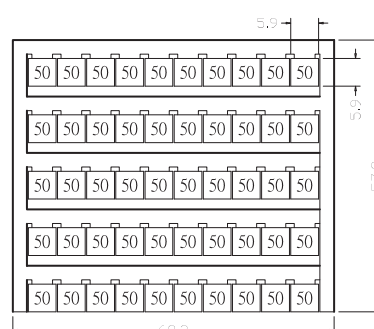


WZ

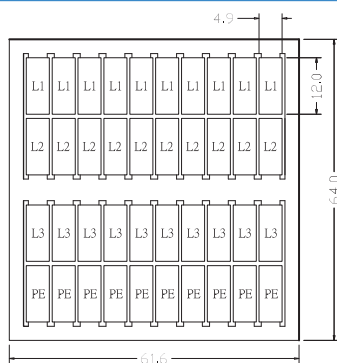


~ TO ~





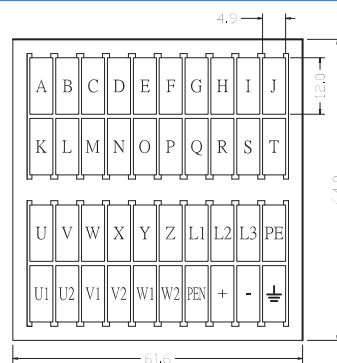


WZ

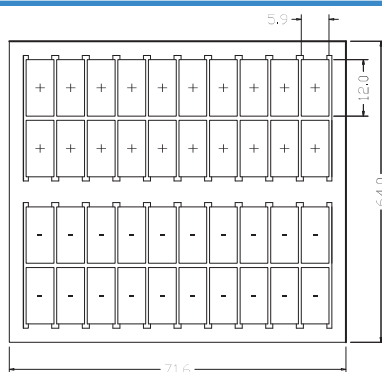

~ TO ~

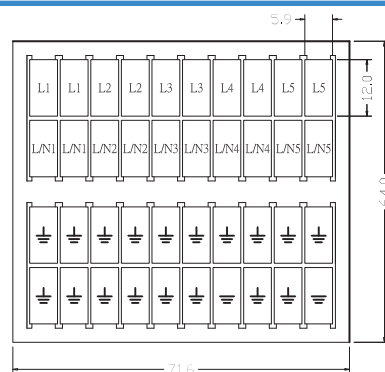

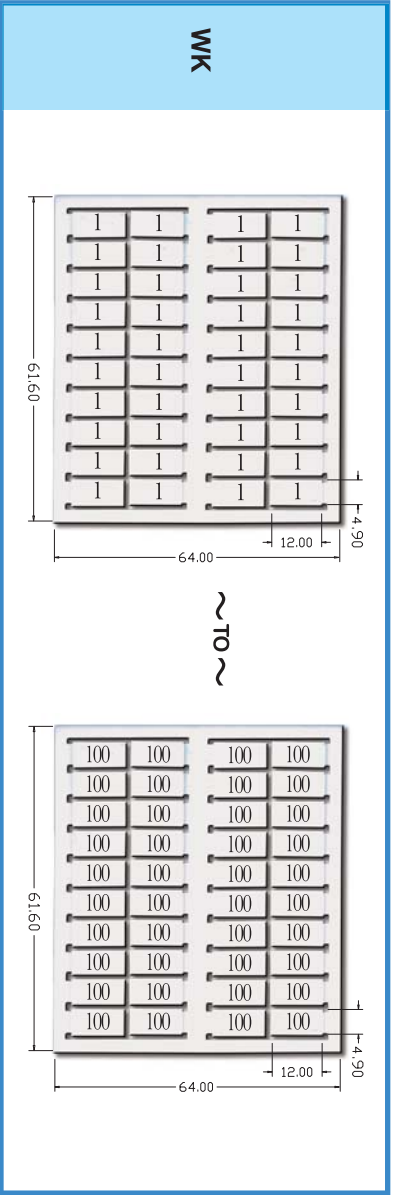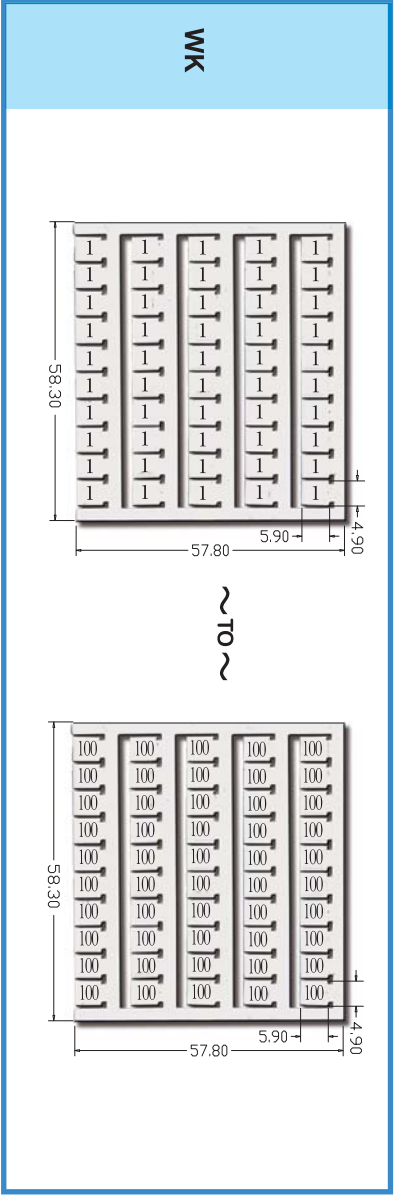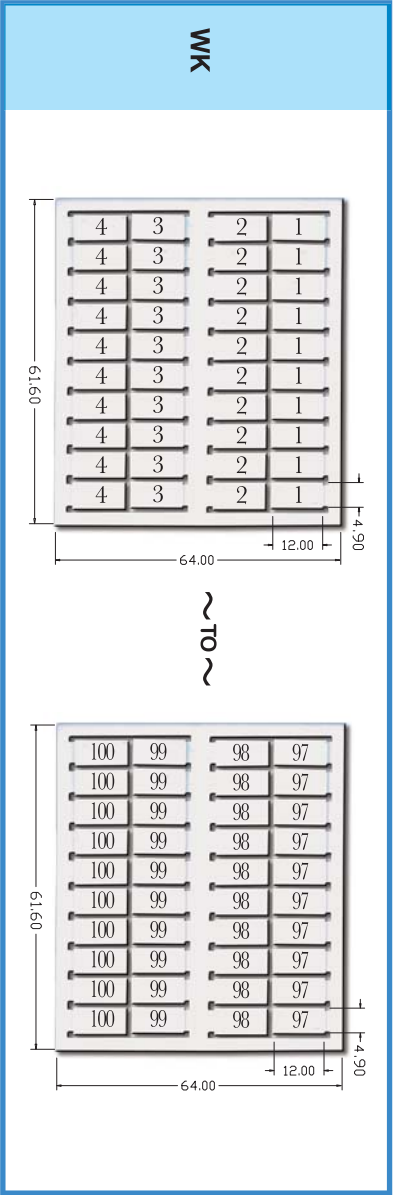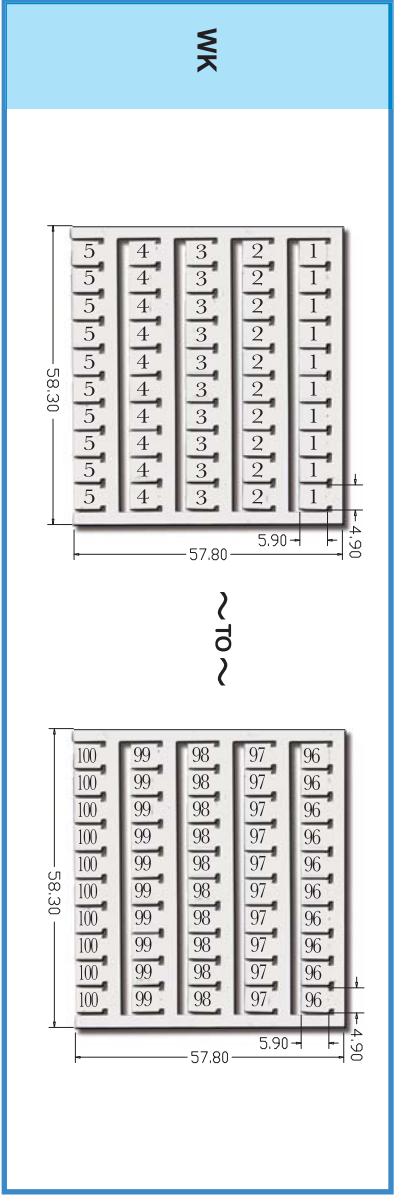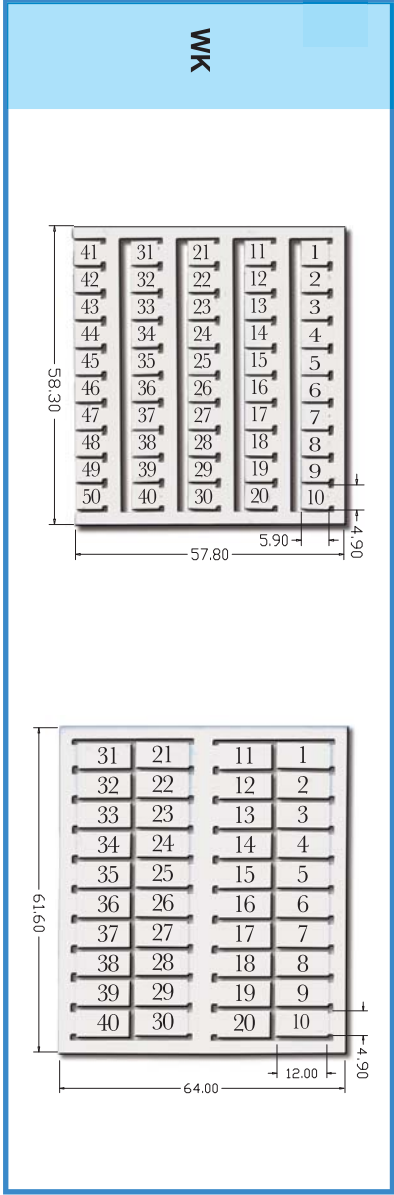

Marker Type	W4	W4K-1/50	W4K-51/100	W4K-A/Z	W4K-1/1	W4K-1/5	W4K-6/10	W4K-11/15	W4K-16/20	W4K-21/25	W4K-26/30	W4K-31/35	W4K-36/40	W4K-41/45	W4K-46/50
		W4Z-1/50	W4Z-51/100	W4Z-A/Z	W4Z1/1	W4Z-1/5	W4Z-6/10	W4Z-11/15	W4Z-16/20	W4Z-21/25	W4Z-26/30	W4Z-31/35	W4Z-36/40	W4Z-41/45	W4Z-46/50
Printing per card	Blank	1~50	51~100	A~Z	1(50x)	1~5(10x) (5 series)	6~10(10x) (5 series)	11~15(10x) (5 series)	16~20(10x) (5 series)	21~25(10x) (5 series)	26~30(10x) (5 series)	31~35(10x) (5 series)	36~40(10x) (5 series)	41~45(10x) (5 series)	46~50(10x) (5 series)
W/H (mm)	4.5x10														
Qty	400														
Model Nos.	SDU4, SDU4/3, SDU4/4, SDU6, SDU6/3, SDU10, SDU10/3, SPE4, SPE4/3, SPE4/4, SPE6, SPE6/3, SPE10, SPE10/3, SDU2.5, SDU2.5/3, SDU2.5/4, SPE2.5, SPE2.5/3, SPE2.5/4,														
Marker Type	W5	W5K-1/50	W5K-51/100	W5K-A/Z	W5K-1/1	W5K-1/5	W5K-6/10	W5K-11/15	W5K-16/20	W5K-21/25	W5K-26/30	W5K-31/35	W5K-36/40	W5K-41/45	W5K-46/50
		W5Z-1/50	W5Z-51/100	W5Z-A/Z	W5Z1/1	W5Z-1/5	W5Z-6/10	W5Z-11/15	W5Z-16/20	W5Z-21/25	W5Z-26/30	W5Z-31/35	W5Z-36/40	W5Z-41/45	W5Z-46/50
Printing per card	Blank	1~50	51~100	A~Z	1(50x)	1~5(10x) (5 series)	6~10(10x) (5 series)	11~15(10x) (5 series)	16~20(10x) (5 series)	21~25(10x) (5 series)	26~30(10x) (5 series)	31~35(10x) (5 series)	36~40(10x) (5 series)	41~45(10x) (5 series)	46~50(10x) (5 series)
W/H (mm)	5x6														
Qty	500														
Model Nos.	CDU2.5, CDU2.5N, CDK2.5, CPE2.5, CTR2.5, CSD2.5, SDU2.5, SDU2.5/3, SDU2.5/4, SDK2.5, SPE2.5, SPE2.5/3, SPE2.5/4, CDU2.5N														
Marker Type	W6	W6K-1/50	W6K-51/100	W6K-A/Z	W6K-1/1	W6K-1/5	W6K-6/10	W6K-11/15	W6K-16/20	W6K-21/25	W6K-26/30	W6K-31/35	W6K-36/40	W6K-41/45	W6K-46/50
		W6Z-1/50	W6Z-51/100	W6Z-A/Z	W6Z-1/1	W6Z-1/5	W6Z-6/10	W6Z-11/15	W6Z-16/20	W6Z-21/25	W6Z-26/30	W6Z-31/35	W6Z-36/40	W6Z-41/45	W6Z-46/50
Printing per card	Blank	1~50	51~100	A~Z	1(50x)	1~5(10x) (5 series)	6~10(10x) (5 series)	11~15(10x) (5 series)	16~20(10x) (5 series)	21~25(10x) (5 series)	26~30(10x) (5 series)	31~35(10x) (5 series)	36~40(10x) (5 series)	41~45(10x) (5 series)	46~50(10x) (5 series)
W/H (mm)	6x6														
Qty	500														
Model Nos.	CDU4, CDU6, CDU10, CDU16, CDU35, CDU50, CDU95, CPE4, CPE6, CPE10, CPE16, CPE35, CPE50, CPE95, CDK4, CDK6, CPE4N, CDK10, CTR4, CTR6, CTR10, CSD4, CSD6, CSD10, CSI4, CSI6, CSI10, SDU4, SDU4/3, SDU4/4, SDU6, SDU6/3, SDU10, SDU16, SPE16, SDU10/3, SPE4, SPE4/3, SPE4/4, SPE6, SPE6/3, SPE10, SPE10/3, CDU4N, CDU6N, CDU10N, CDU4M, CPE6N, CPE10N, CTL6, CTL6-1														
Marker Type	W7	W7K-1/40	W7K-41/80	W7K-A/Z	W7K-1/1	W7K-1/4	W7K-5/8	W7K-9/12	W7K-13/16	W7K-17/20	W7K-21/24	W7K-25/28	W7K-29/32	W7K-33/36	W7K-37/40
		W7Z-1/40	W7Z-41/80	W7Z-A/Z	W7Z-1/1	W7Z-1/4	W7Z-5/8	W7Z-9/12	W7Z-13/16	W7Z-17/20	W7Z-21/24	W7Z-25/28	W7Z-29/32	W7Z-33/36	W7Z-37/40
Printing per card	Blank	1~40	41~80	A~Z	1(40x)	1~4(10x) (4 series)	5~8(10x) (4 series)	9~12(10x) (4 series)	13~16(10x) (4 series)	17~20(10x) (4 series)	21~24(10x) (4 series)	25~28(10x) (4 series)	29~32(10x) (4 series)	33~36(10x) (4 series)	37~40(10x) (4 series)
W/H (mm)	5x12														
Qty	400														
Model Nos.	CDU2.5, CPE2.5, CTR2.5														
Marker Type	W8	W8K-1/40	W8K-41/80	W8K-A/Z	W8K-1/1	W8K-1/4	W8K-5/8	W8K-9/12	W8K-13/16	W8K-17/20	W8K-21/24	W8K-25/28	W8K-29/32	W8K-33/36	W8K-37/40
		W8Z-1/40	W8Z-41/80	W8Z-A/Z	W8Z-1/1	W8Z-1/4	W8Z-5/8	W8Z-9/12	W8Z-13/16	W8Z-17/20	W8Z-21/24	W8Z-25/28	W8Z-29/32	W8Z-33/36	W8Z-37/40
Printing per card	Blank	1~40	41~80	A~Z	1(40x)	1~4(10x) (4 series)	5~8(10x) (4 series)	9~12(10x) (4 series)	13~16(10x) (4 series)	17~20(10x) (4 series)	21~24(10x) (4 series)	25~28(10x) (4 series)	29~32(10x) (4 series)	33~36(10x) (4 series)	37~40(10x) (4 series)
W/H (mm)	6x12														
Qty	400														
Model Nos.	CDU4, CDU6, CDU10, CDU16, CDU35, CDU50, CDU95, CPE4, CPE6, CPE10, CPE16, CPE35, CPE50, CPE95, CTR4, CTR6, CTR10, SDU2.5, SDU2.5/3, SDU2.5/4, SPE2.5, SPE2.5/3, SPE2.5/4, CTL6, CTL6-1														

Orbit Cuts off Utensil

Characteristic

- Guide apparatus for cutting a 90 degree angle exactly.
- Easy assembly on the workbench.
- Measure alignment metric and inch.
- Length stop:1000mm
- Burr-free cutting without loss.
- Shearing blade can be re-sharpened.
- Maintenance free.
- Labor saving due to better force transfer.

- Shearing blade
- 裁刀

軌道切斷器／特性



- 九十度切割的前導裝置
- 易組裝於工作木台上
- 以公制和英制作量測校準
- 附帶卡尺可量測最大長度：1000mm
- 無耗材的切割方式
- 裁刀可重覆研磨
- 免費維修
- 絕佳的省力切割方式

TSCU



- Length stop:1000 mm
- 附帶卡尺可量測最大長度：1000mm

- Reinforced eccentric
- 偏心輪

Carrier rails



- Carrier rail 35 mm/7.5
Acc. to EN 50022
- 軌道寬度35mm/高度7.5mm
符合EN 50022之標準



- Carrier rail 35 mm/15
Acc. to EN 50022
- 軌道寬度35mm/高度15mm
符合EN 50022之標準

- Guide apparatus for cutting a 90 degree angle exactly.
- 九十度切割的前導裝置