


MA527 PCB Terminal Block, Modular



MA


DIMENSIONS/POSITIONS

MA527-500M

| | | |
|--------|-------------------------|--------------------------|
| 間距 | Pitch | 5.00mm |
| 位數 | Poles | 2 ~ 3Poles |
| 塑膠本體 | Housing Material | PA 66 |
| 彈片 | Spring | Stainless Steel |
| 端子 | Contact | Brass, Tin Plated |
| 螺紋 | Screw Thread | M3.0, Steel, Zinc Plated |
| 電線線徑 | Wire Size | 14~22AWG |
| 剝線長度 | Wire Strip Length | 6mm ~ 7mm |
| PCB孔徑 | PCB Hole Diameter | 1.8mm |
| 最大緊固扭矩 | Tightening Torque, Max. | 7.08 Lb-in |
| 環境作業溫度 | Operating Temperature | -40°C to +105°C |

TECHNICAL DATA

| | | |
|---|-----------------------|--------------------|
| 連接符合標準 Connection in acc. with standard EN-VDE | | |
| 額定電流 I_n | Nominal Current I_n | 16A |
| 額定橫截面 | Nominal Cross Section | 1.5mm ² |
| 最大負載電流 | Maximum load current | 16A |
| 絕緣材料 | Insulating Material | PA |
| 阻燃等級,符合UL94 Inflammability class acc. to UL94 | | V0 |
| 額定電壓,UL/CUL Nominal voltage, UL/CUL | | 300V |
| 額定電流,UL/CUL Nominal current, UL/CUL | | 16A |

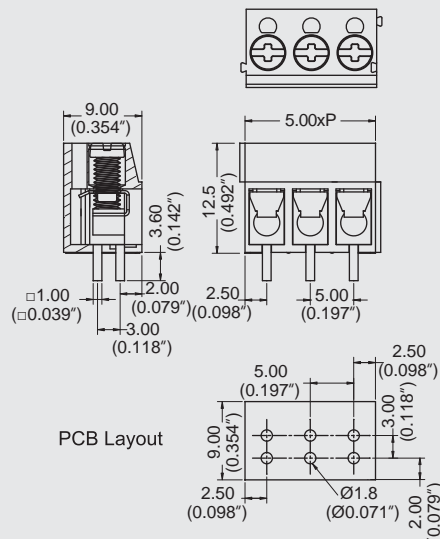

Note:
Screw Plating: Changes are available upon request