


MA527 PCB Terminal Block, Modular



MA


DIMENSIONS/POSITIONS

MA527-500M

間距	Pitch	5.00mm
位數	Poles	2 ~ 3Poles
塑膠本體	Housing Material	PA 66
彈片	Spring	Stainless Steel
端子	Contact	Brass, Tin Plated
螺紋	Screw Thread	M3.0, Steel, Zinc Plated
電線線徑	Wire Size	14~22AWG
剝線長度	Wire Strip Length	6mm ~ 7mm
PCB孔徑	PCB Hole Diameter	1.8mm
最大緊固扭矩	Tightening Torque, Max.	7.08 Lb-in
環境作業溫度	Operating Temperature	-40°C to +105°C

TECHNICAL DATA

連接符合標準 Connection in acc. with standard EN-VDE		
額定電流 I _n Nominal Current I _n		16A
額定橫截面 Nominal Cross Section		1.5mm ²
最大負載電流 Maximum load current		16A
絕緣材料 Insulating Material		PA
阻燃等級,符合UL94 Inflammability class acc. to UL94		V0
額定電壓,UL/CUL Nominal voltage, UL/CUL		300V
額定電流,UL/CUL Nominal current, UL/CUL		16A

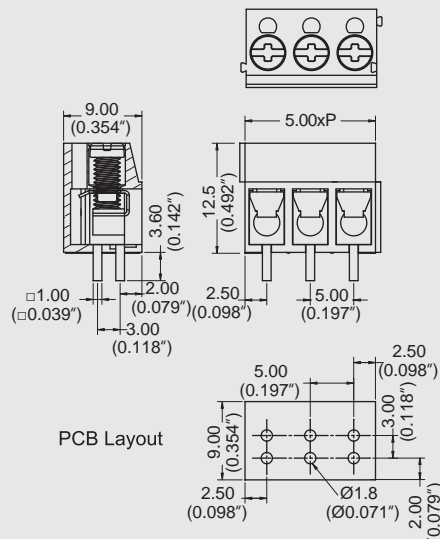

PCB Layout

Note:
Screw Plating: Changes are available upon request